
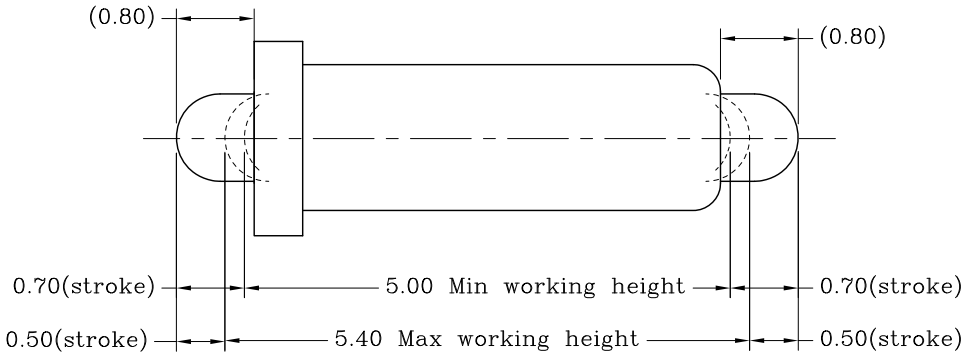


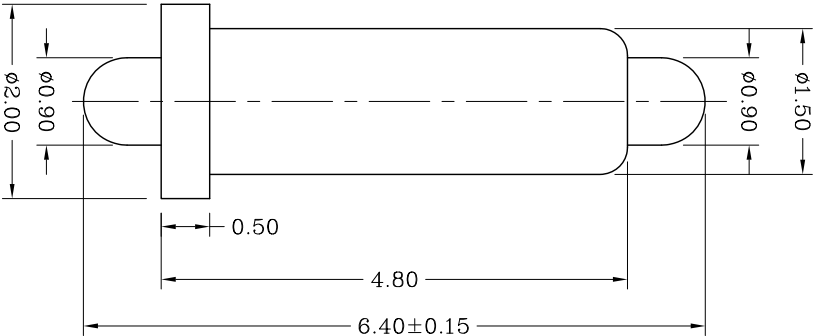

TOP-LINK

Item	Part name	Q'ty/Ed	Material	Finish
1	Body	1	Leaded Brass	Au plating over Ni
2	Plunger	2	Leaded Brass	Au plating over Ni
3	Spring	1	Stainless steel wire	_____
4				
5				

Table 1 Mechanical performance			
Max working height	5.40mm	70gf min<2.1>	
Min working height	5.00mm	100±25gf	
Durability		10000cycle	

Notes:

- 1 Dimensions shall be interpreted per ASME Y14.5M.
- 2 Mechanical performance(See the table 1)
<2.1>The force is the average of forces obtained when plunger goes downwards and upwards.
<2.2>Warning: Working height are not permitted to be less than Min working height.
- 3 Electrical performance
Resistance: 30mOhm max Current rating: 2.0A
4 RoHS compliant.
- 5 Customer P/N: C106

Top-Link Electronics Ltd.			
Type	Customer drawing	Unit	mm
TOLERANCES UNLESS OTHER SPECIFIED	DWN: Qin	APVD:	
0.0 = ±0.15	CHK:	REL:	
0.00 = ±0.10	Name POGO PIN		
0.000 = ±0.001	Angle: ±1°		
Angle: ±1°	SURF. TEXTURE: REMOVE BURRS.		
Angle: ±1°	BREAK SHARP EDGES R0.05 MAX DO NOT SCALE PRINT.		
Scale	Size	DWG No.	Page
1:1	A4	C-101513	1/1
PART NUMBER			Rev. 1

Top-Link Electronics Ltd.