
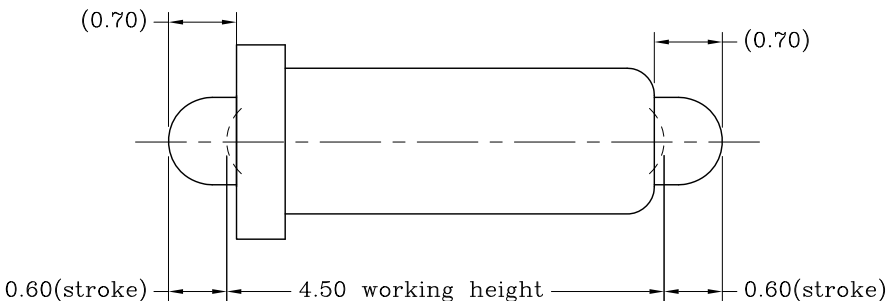


proposal

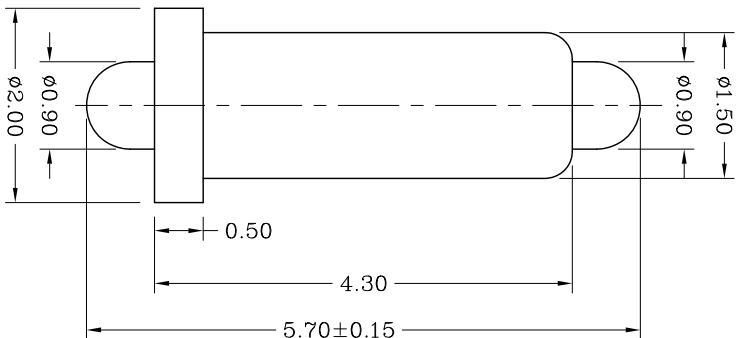

TOP-LINK

Notes:

- 1 Dimensions shall be interpreted per ASME Y14.5M.
- 2 Mechanical performance(See the table 1)
- <2.1>The force is the average of forces obtained when plunger goes downwards and upwards.
- 3 Electrical performance
 - Resistance: 30mOhm max
 - Current rating: 2.0A
- 4 RoHS compliant.
- 5 Customer P/N: C102

Table 1 Mechanical performance

Table 1 Mechanical performance	
working height	4.50mm 80gf min<2.1>
Durability	10000cycle

Item	Part name	Q'ty/Ea'	Material	Finish
1	Body	1	Leaded Brass	Min Au 0.1um over min Ni 1.4um
2	Plunger	2	Leaded Brass	Min Au 0.4um over min Ni 1.4um
3	Spring	1	Stainless steel wire	_____
4				
5				

DIST	---
DIST	---

2	UPDATE	2013/06/05
1	NEW	2011/08/02
Rev.	Revision record.	Date.

Top-Link Electronics Ltd	Type	Customer drawing	Unit	mm	Weight
TOLERANCES UNLESS OTHER SPECIFIED	DWG:	APVD:			Top-Link Electronics Electronics Ltd
0.0 = ± 0.15	Guizhiguo				
0.00 = ± 0.10	CHK:	REL:			
0.000 = ± 0.005					
Angle: 45°	Name	POGO PIN			
SURF TEXTURE: REMOVE BURR.					
BREAK SHARP EDGES R0.05 MAX.DD NOT SCALE PRINT.	Scale	Size	DWG No.		
	1:1	A4	C-101514	Page 1/1	Rev. 2