


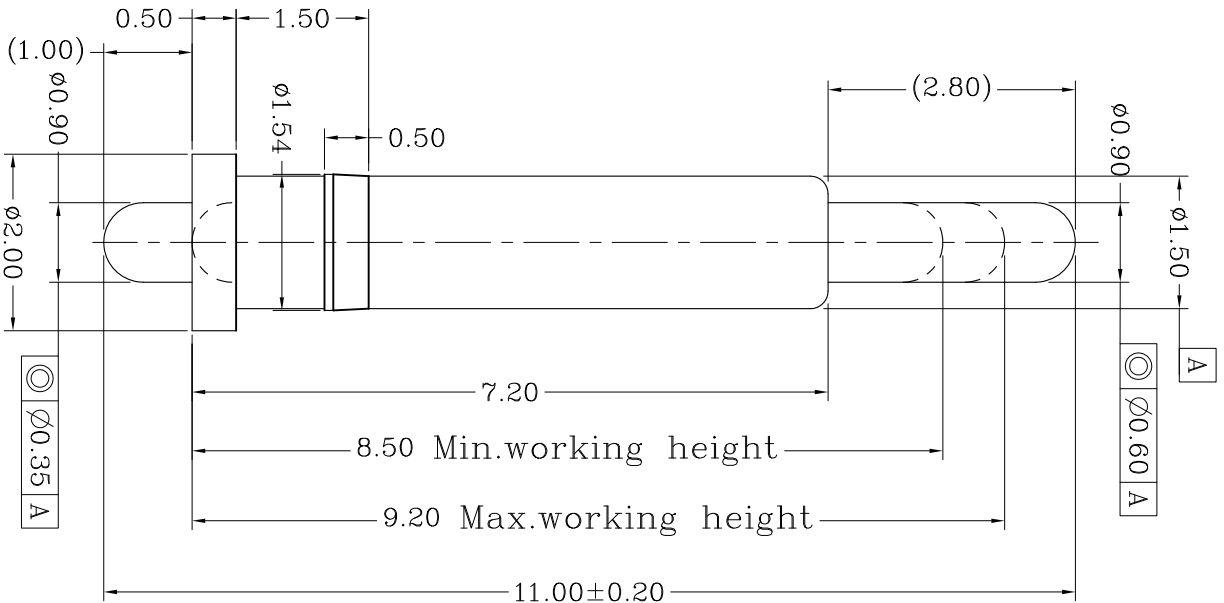

TOP-LINK

Notes:

- 1 Dimensions shall be interpreted per ASME Y14.5M.
- 2 Mechanical performance(See the table 1)
- 3 Electrical performance
- 4 RoHS compliant.

Item	Part name	Q'ty/Ed	Material	Finish
1	Body	1	Leaded Brass	Au 0.1um plating over Ni 1.4um min plating A.1.
2	Plunger	2	Leaded Brass	Au 0.4um plating over Ni 1.4um min plating A.1.
3	Spring	1	Stainless steel wire	_____
4				
5				

Table 1 Mechanical performance			
Max.working height	9.20mm	80gf min<2.1>	
Min.working height	8.50mm	200gf max	
Durability	10000cycle		

Top-Link Electronics Ltd.		Type	Customer drawing	Unit	mm	Weight	PART NUMBER
TOLERANCES UNLESS OTHER SPECIFIED		DWN:	Gui zhiguo	APVD:			101755-1
0.0 = ±0.15		CHK:		REL:			
0.00 = ±0.10		Name POGO PIN					
0.000 = ±0.005		SURF. TEXTURE:					
Angle: ±1°		REMOVE SHARP EDGES					
SCALE PRINT:		BREAK MAX DO NOT					
		SCALE PRINT:					

1.1	update	2013/09/22
1	NEW	2012/06/13
Rev.	Revision record.	Date.

DIST
DIST
DIST