






proposal

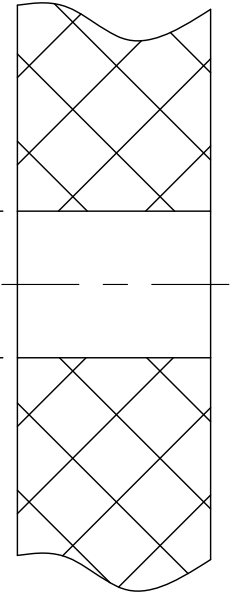

$\phi 1.51 \pm 0.01$

Recommended Dimensions of HSG

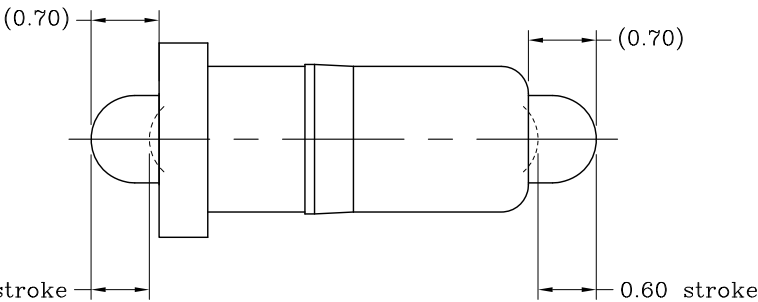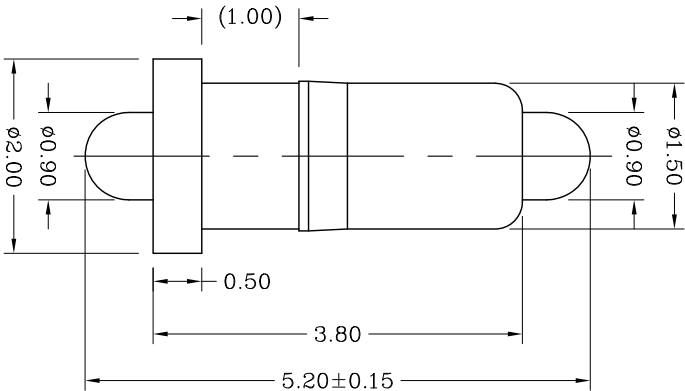

TOP-LINK

Table 1 Mechanical performance		
working Stroke	1.20mm	80gf min<2.1>
Durability	10000cycle	

- Notes:
- 1 Dimensions shall be interpreted per ASME Y14.5M.
 - 2 Mechanical performance(See the table 1)
 - 3 Electrical performance
 - 4 RoHS compliant.

Item	Part name	Q'ty/Ea'	Material	Finish
1	Body	1	Leaded Brass	Au plating over Ni
2	Plunger	2	Leaded Brass	Au plating over Ni
3	Spring	1	Stainless steel wire	
4				
5				

Type	Customer drawing	Unit	mm	Weight	PART NUMBER
Top-Link Electronics Ltd.	DWN: Gui zhiguo	APVD:			20101010998
TOLERANCES UNLESS OTHER SPECIFIED	CHK:	REL:			
0.0 = ±0.15					
0.00 = ±0.10					
0.000 = ±0.05					
Angle: ±1°					
SURF. TEXTURE:					
REMOVE BURRS.					
BREAK SHARP EDGES					
R0.05 MAX. DO NOT SCALE PRINT.					
Name	POGO PIN				
Scale	1:1	Size	A4	DWG No.	C-20101010998
Page	1/1	Rev.	2		

DIST

4

3

2

1