


DIST

4

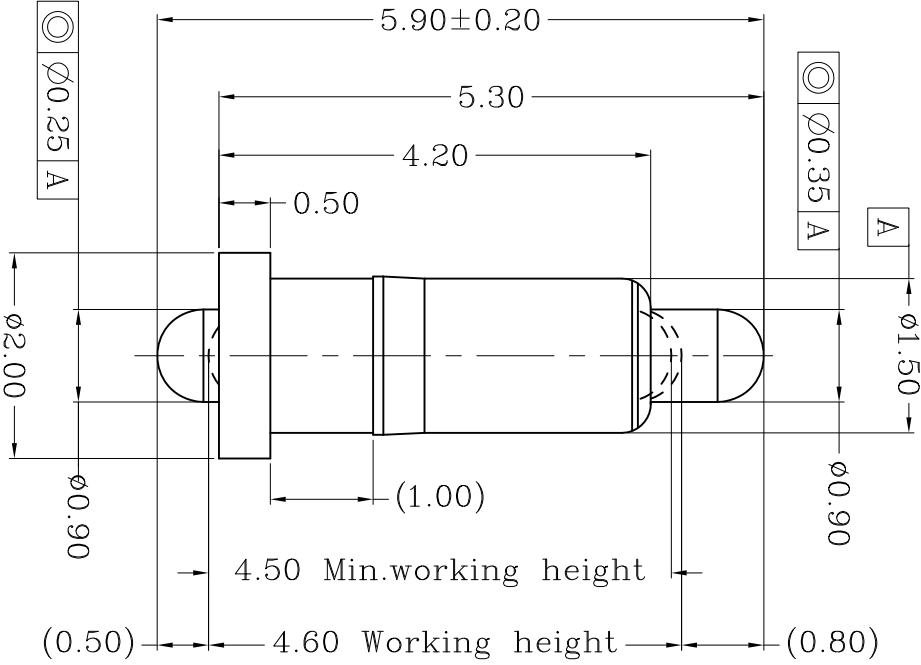

Rev.	NEW	Date.
A	2015/07/08	
Revision record.		

3

2

1

TOP-LINK

- Notes:
- 1 Dimensions shall be interpreted per ASME Y14.5M.
 - 2 Mechanical performance(See the table 1)
<2.1>The force is the average of forces obtained when plunger goes downwards and upwards.
<2.2>Warning:Working height are not permitted to be less than Min working height.
 - 3 Electrical performance
Resistance:30mOhm Max.
Current rating:2.0A
 - 4 RoHS compliant.

Item	Part name	Q'ty/Ed	Material	Finish
1	Body	1	Leaded Brass	Au 0.1um plating Ni 1.4um
2	Plunger	2	Leaded Brass	Au 0.4um plating Ni 1.4um
3	Spring	1	Stainless steel wire	_____
4				
5				

Table 1 Mechanical performance		
Working height	4.60mm	65±25gf <2.1>
Durability	10000cycle	

Top-Link Electronics Ltd.		Type	Unit	Weight
TOLERANCES UNLESS OTHER SPECIFIED		Customer drawing	mm	
0.0	±0.15	DWN:	APVD:	
0.00	±0.10	CHK:	REL:	
0.000	±0.05	Angle: ±1°		
SURF. TEXTURE: REMOVE BURRS. BREAK SHARP EDGES R0.05 MAX. DO NOT SCALE PRINT.		Name	POGO PIN	
Scale	1:1	Size	A4	DWG No.
				C-20101011155
Page	1/1	Rev.	A	

20101011155
PART NUMBER

Top-Link Electronics Ltd.