


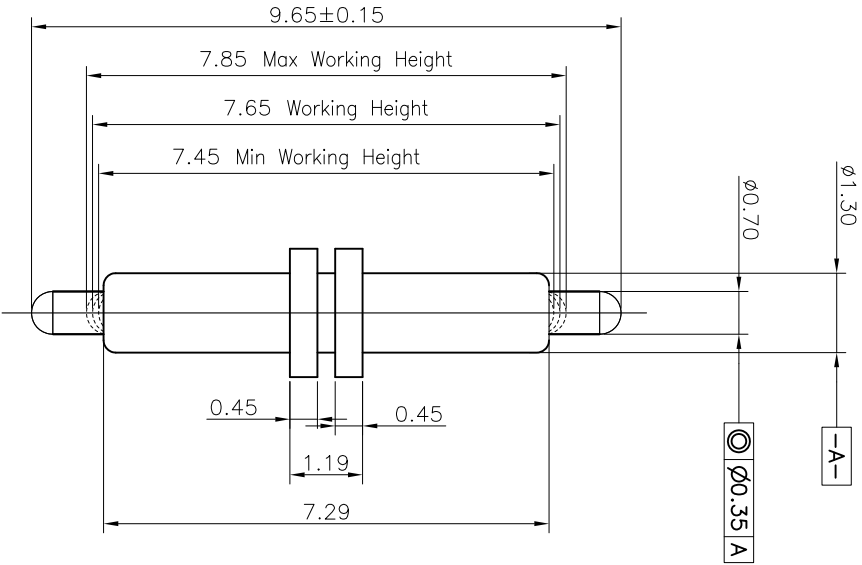

TOP-LINK

- Notes:
- 1 Dimensions shall be interpreted per ASME Y14.5M.
 - 2 Mechanical performance(See the table 1)
 - <2.1>The force is the average of forces obtained when plunger goes downwards and upwards.
 - <2.2>Warning:Working height are not permitted to be less than Min working height.
 - 3 Electrical performance
 - <3.1>Current rating: 0.5A
 - <3.2>Voltage rating: 36VAC/DC
 - <3.3>Dynamic Resistance:30mOhm Max. (between max and min working height)
 - 4 Environmental performance
 - <4.1>RoHS compliant.
 - <4.2>Salt Spray:48h Min
 - <4.3>Operating Temperature range: $-40^{\circ}\text{C} \sim +85^{\circ}\text{C}$
 - <4.4>Withstanding Higt Temperature: $260^{\circ}\text{C}/10\text{Sec}$
 - 5 Packaging: Bag

Table 1:Mechanical performance		
Working Height	7.65mm	$70 \pm 20\text{gf}$
Durability	10000 Cycles Min.	

Top-Link Electronics Ltd. TOLERANCES UNLESS OTHER SPECIFIED 0. = ± 0.15 0.0 = ± 0.10 0.000 = $\pm$ Angle: $\pm 1^{\circ}$ SURF. TEXTURE: REMOVE BURRS. BREAK SHARP EDGES R0.05 MAXDO NOT SCALE PRINT.		
Type	Customer drawing	Unit mm
DWN:	Eric	APVD: Lansing
CHK:	Kent	REL:
NAME	Pogo PIN	
Scale	Size A4	Part NO. 20101011593
1:1		Page 1/1
		Rev: 1

top-link