


proposal

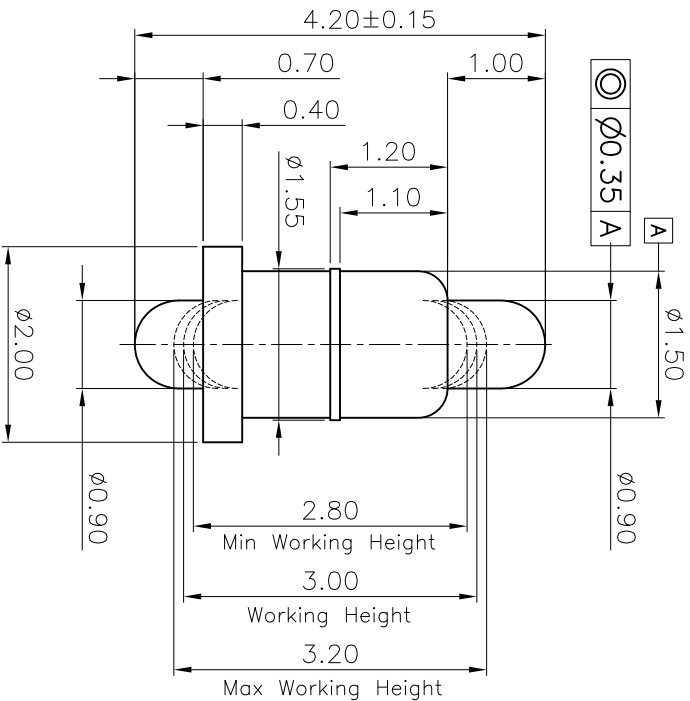

TOP-LINK

- Notes:
- 1 Dimensions shall be interpreted per ASME Y14.5M
 - 2 Mechanical performance(See the table 1)
 - <2.1>The force is the average of forces obtained when plunger goes downwards and upwards
 - <2.2>Warning:Working height are not permitted to be less than Min working height
 - 3 Electrical performance
 - <3.1>Current rating: 1.0A
 - <3.2>Voltage rating: 36VAC/DC
 - <3.3>Dynamic Resistance:100MΩmm Max (between max and min working height)
 - <3.4>Insulation Resistance:100MΩhm minimum
 - 4 Environmental performance
 - <4.1>RoHS compliant
 - <4.2>Salt Spray:48h Min
 - <4.3>Operating Temperature range: -40°C~+85°C
 - <4.4>Withstanding Higt Temperature:260°C/10Sec
 - 5 Packaging: Bag

Table 1:Mechanical performance		
Working Height	3.00mm	120±20gf
Durability	10000 Cycles	Min.

Top-Link Electronics Ltd.			
TOLERANCES UNLESS OTHER SPECIFIED			
0.0	= ± 0.15		
0.00	= ± 0.10		
0.000	= ± 0.05		
Angle	= ± 1°		
SURF. TEXTURE: REMOVE BURRS. BREAK SHARP EDGES R0.05 MAXDO NOT SCALE PRINT.			
Type	Customer drawing	Unit	mm
DWN:	Alan	APVD:	
CHK:	REL:		
NAME Pogo PIN			
Scale	Size	Part NO.	Page
1:1	A4	20101011849	1/1
			Rev: XA

top-link

Item	Revision record	Date
XA	New Release	2017.04.11