


proposal

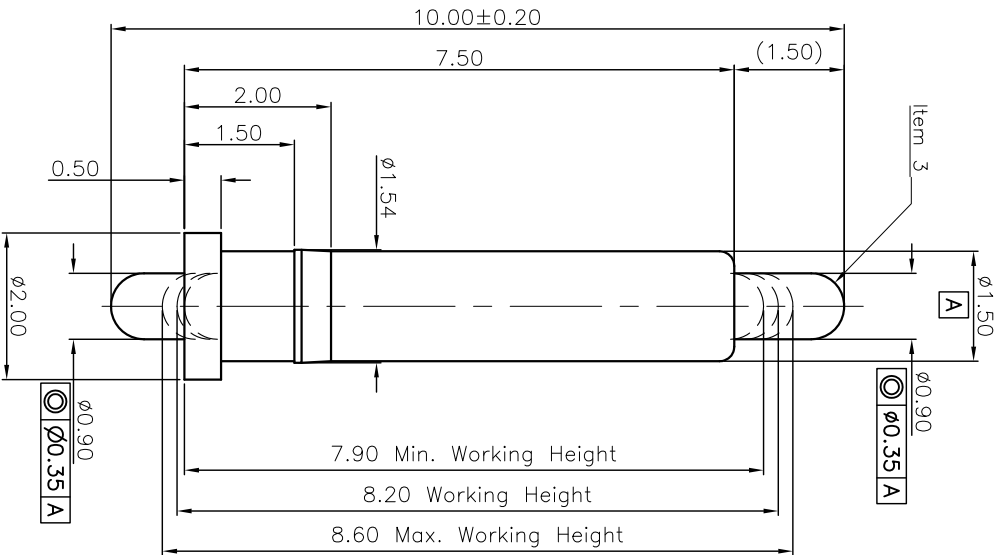

TOP-LINK

- Notes:
- 1 Dimensions shall be interpreted per ASME Y14.5M
 - 2 Mechanical performance(See the table 1)
 - <2.1>The force is the average of forces obtained when plunger goes downwards and upwards
 - <2.2>Warning:Working height are not permitted to be less than Min working height
 - 3 Electrical performance
 - <3.1>Current rating: 2.0A
 - <3.2>Voltage rating: 36VAC/DC
 - <3.3>Dynamic Resistance:30mOhm Max (between max and min working height)
 - 4 Environmental performance
 - <4.1> RoHS compliant
 - <4.2>Salt Sproy: 48h Min
 - <4.3>Operating Temperature range: -40°C~+85°C
 - <4.4>Withstanding High Temperature:260°C/10Sec
 - 5 Packaging:Bag.

Table 1:Mechanical performance		
Working Height	9.20mm	120±30gf
Durability	10000 Cycles Min.	

Top-Link Electronics Ltd.	
TOLERANCES UNLESS OTHER SPECIFIED	
0.0	= ± 0.15
0.00	= ± 0.10
0.000	= ± 0.05
Angle: 45°	
SURF. TEXTURE: REMOVE SHARP EDGES	
RO.05 MAX. DO NOT SCALE PRINT.	

Type	Customer drawing	Unit	mm
DRW:	Alan	APRD:	
CHK:	REL:		
Name	Pogo Pin		
Scale	Size	Part NO.	Page
1:1	A4	20101011984	1/1
			Rev: XA

top-link