


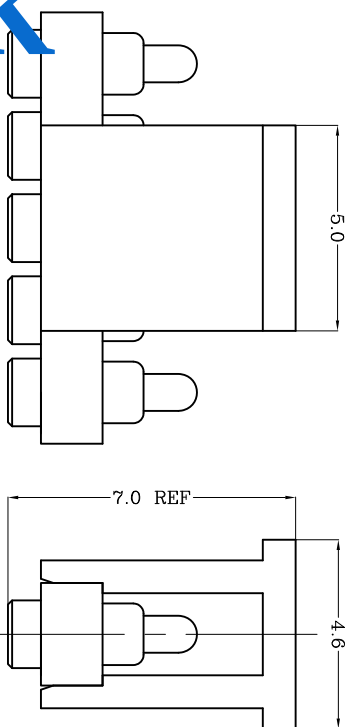

2 Plating:

1)Body: Min 0.1um Gold plating over min. 1.4um Nickel plating (Body) 1um Min 镍底:4um Min)	
2)Plunger: Min 0.4um Gold plating over min. 1.4um Nickel plating (Plunger: 镀金0.4um Min 镍底:1.4um Min)	

3 Mechanism:
Force: $100 \pm 269\text{gf}$ per pin at 1.0mm stroke
(力: $100 \pm 269\text{mm}$ 的力: $100 \pm 269\text{gf}$)
Total stroke (总行程): 1.20mm
Durbin (总行程): 10,000 cycle min.

4. Electrical properties

Contact resistance (接触抵抗):	50mOhm	Max
Voltage rating (额定电压):	36V	DC Max
Current rating (额定电流):	2.0A	

100281-5
PART NUMBER

USED ON