




TOP-LINK

Table 1 Mechanical performance		
working height	6.00mm	110±30gf <2.1>
Durability	10000cycle	

- 1 Dimensions shall be interpreted per ASME Y14.5M.
- 2 Mechanical performance(See the table 1)
- <2.1>The force is the average of forces obtained when plunger goes downwards and upwards.
- 3 Electrical performance
- Resistance: 30mOhm Max.Current rating: 2.0A
- 5 RoHS compliant.

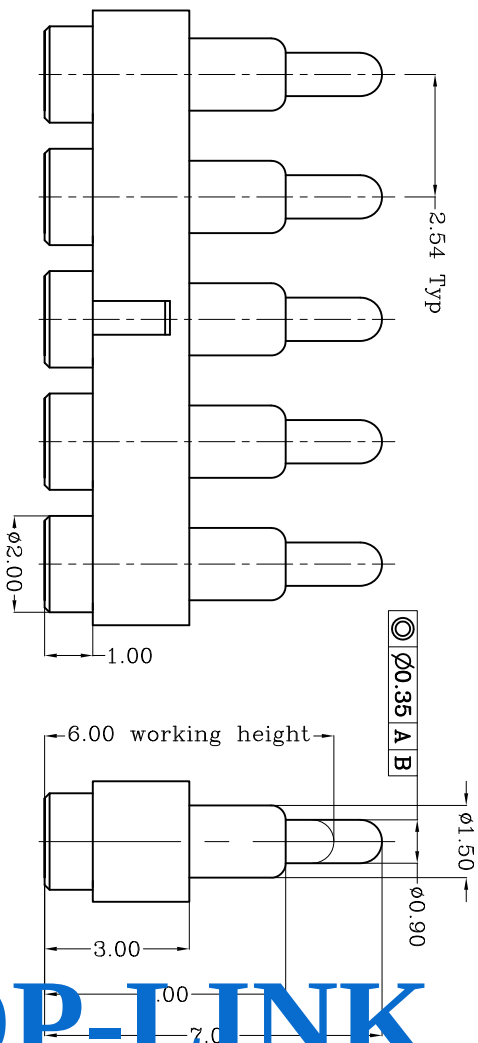

110728-5
PART NUMBER

Type		Unit		Weight	
Customer drawing		mm			
DWG: Qin Zuozhong		APVD:		<i>Top-Link Electronics</i>	
CHK:		REL:		Top-Link Electronics Ltd.	
Name		Customer drawing			
Scale	Size	DWG No.		Page	Rev.
1:1	A4	C-110728		1/1	1
Top-Link Electronics Ltd.					
TOLERANCES UNLESS OTHER SPECIFIED					
0.0 = ± 0.15					
0.00 = ± 0.10					
0.000 = ± .					
Angle: ±1°					
SURF TEXTURE: REMOVE BURRS.					
BREAK SHARP EDGES R0.05 MAX.DO NOT SCALE PRINT.					
Top-Link Electronics Ltd.					
2					
Date.		Revision record.			
3					
Rev.					
NEW		2011/08/16			
DIST					

DIST					

4					