
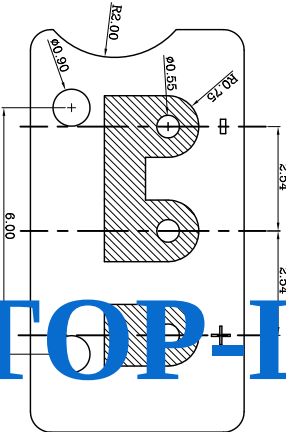
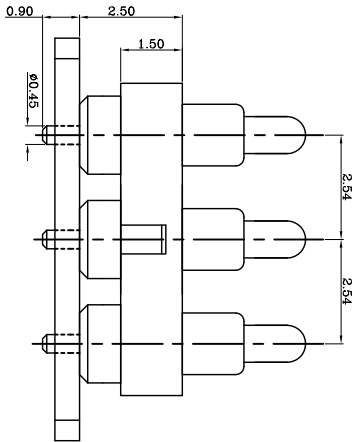
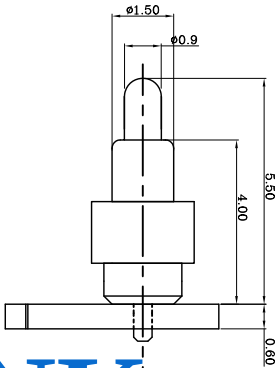


DWG NO.
C-110573

THIS INFORMATION IS CONFIDENTIAL AND IS DISCLOSED TO YOU ON CONDITION THAT NO FURTHER DISCLOSURE IS MADE BY YOU TO OTHER THAN TOP-LINK PERSONNEL WITHOUT WRITTEN AUTHORIZATION FROM TOP-LINK LTD.

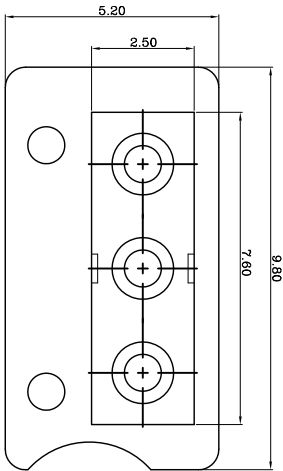

Recommended PCB Layout

TOP-LINK

USED ON

-

Notes:

1) Material(材质):

Housing: PA 46, UL94 V-0 Color Black.

Contact: Brass

Spring :Stainless steel wire

2) Plating:

1)Body: Min 0.1um Gold plating over min. 1.4um Nickel plating

(Body: 镀金0.1um Min 镍底1.4um Min)

2)Plunger: Min 0.4um Gold plating over min. 1.4um Nickel plating

(Plunger: 镀金0.4um Min 镍底1.4um Min)

3) Mechanical:

Total stroke(总行程): 1.50mm

Durability(寿命): 10,000 cycle min.

4) Electrical(电性能)

Contact resistance(接触抵抗): 30mOhm Max.

Voltage rating(额定电压): 36V DC Max

Current rating(额定电流): 2.0A

110573-3
PART NUMBER

DIMENSIONS IN MM TOLERANCES UNLESS OTHER SPECIFIED				MATERIAL				FINISH			
0	= ±			△							✓
0.0	= ±0.15			DWN		APVD					
0.00	= ±0.10			CHK		REL					
0.000	= ±										
ANGLE: ±1°											
SURF TEXTURE: 32/				NAME	POGPD PIN CONNECTOR 3 POSITIONS						
REMOVE BURRS, BREAK				SCALE	1:1	A4	DWG	NO.	C-110573	SHEET	REV
SHARP EDGES R0.05 MAX										1 OF 1	B
DD NOT SCALE PRINT											

LOC	-
DIST	-

4

3

2

1