
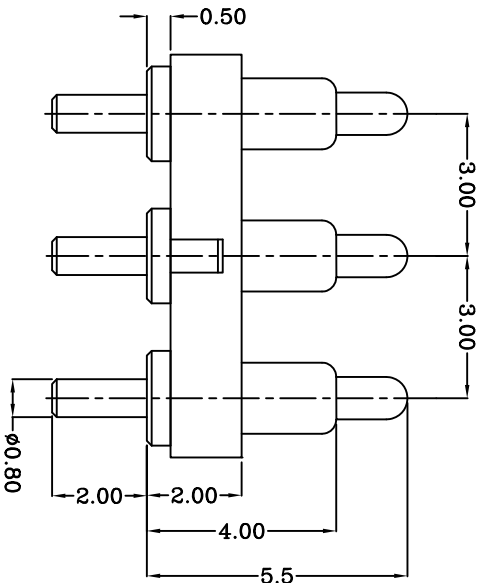



Recommended PCB Layout

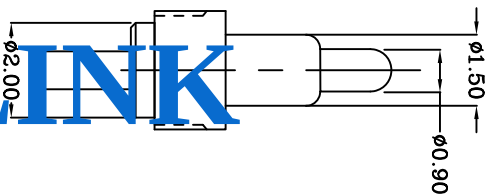

TOP-LINK

Notes:

1 Material, Housing: PA 4.6 (30% Glass Filled)

Color Black.

Contact: Brass

2 Mechanical demands:

1)Plating Plunger: 0.4um Au over 1.4um Ni

2)Plating Body: 0.1um Au over 1.4um Ni.

3 Mechanic:

1)Total stroke : 1.40mm

2)Durability: 10,000 cycle min.

4 Electrical

1)Contact resistance: 30mOhm Max.

2)Voltage rating: 36V DC Max

3)Current rating: 2.0A

USED ON

-

110686-3
PART NUMBER

MATL	HT	TR	FIN
	—	—	

DWN	APVD
Qin	
CHK	REL

Top-Link
Electronics L.td.

DIMENSIONS IN MM TOLERANCES UNLESS OTHER SPECIFIED	MATL		HT TR	—	FIN	— 
0 = ± 0.0 = ±0.10 0.00 = ±0.10 0.000 = ±1	DVN		APVD		<i>top-link</i> <u>Electronics</u> Top-Link Electronics L.td.	
ANGLE: ±1°	CHK		REL			
SURF TEXTURE: $\frac{3.2}{\sqrt{1}}$	NAME PGGD 3P PGC-1.5-5.5-R-3P-3.0PH					
REMOVE BURS, BREAK SHARP EDGES R0.05 MAX DO NOT SCALE PRINT	SCALE	A4	DWG NO.	C-110686	SHEET 1 OF 1	REV 1
	1:1					

LTR	REVISION	APVD	DATE
NEW			2010/09/13
RECORD	RECORD	APVD	DATE

LDC	DIST
-	-

4

3

2

1