


proposal

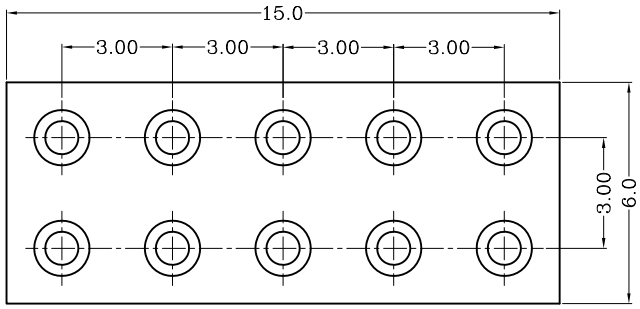

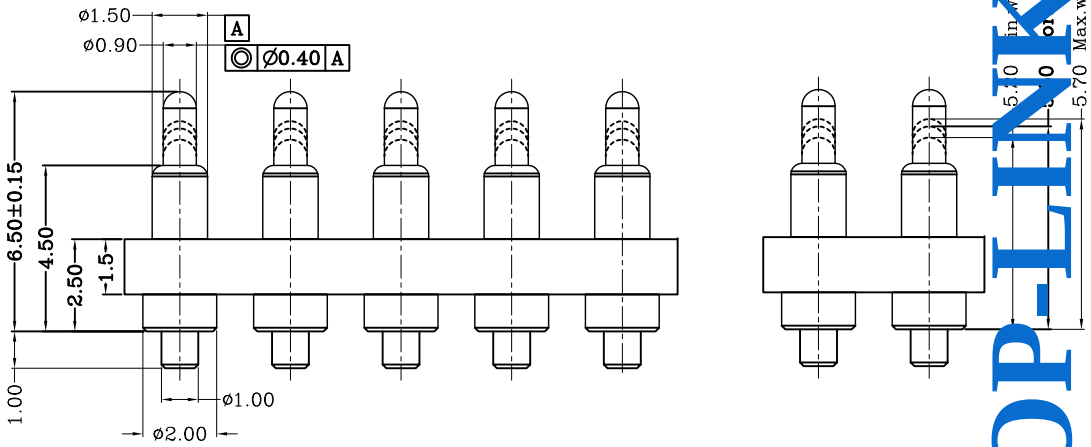

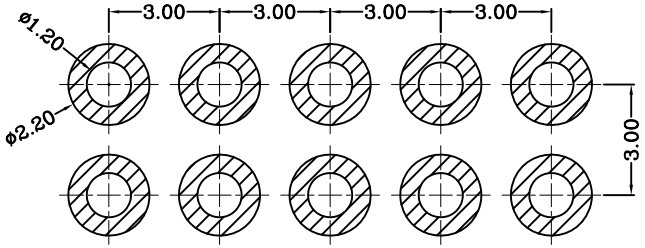

Recommended PCB Layout

Item	Part name	Q'ty/Ea'	Material	Finish
1	HSG	1	High temp.Plastic UL94 V-0 Color Black	———
2	Body	10	Leaded Brass	Min Au 0.1um over min Ni 1.4um
3	Plunger	10	Leaded Brass	Min Au 0.4um over min Ni 1.4um
4	Spring	10	Stainless steel wire	———
5				

Table 1 Mechanical performance		
Working height	5.50mm	125±35gf <2.1>
Durability	10000cycle	

Notes:
1 Dimensions shall be interpreted per ASME Y14.5M.
2 Mechanical performance(See the table 1)
<2.1>The force is the average of forces obtained when plunger goes downwards and upwards.
<2.2>Warning: Working height are not permitted to be less than Min working height.
3 Electrical performance
Resistance: 30mOhm Max.
Current rating: 2.0A
5 RoHS compliant.

TOP-LINK

THIS INFORMATION IS CONFIDENTIAL AND IS DISCLOSED TO YOU ON CONDITION THAT NO FURTHER DISCLOSURE IS MADE BY YOU TO OTHER THAN TOP-LINK PERSONNEL WITHOUT WRITTEN AUTHORIZATION FROM TOP-LINK LTD.

DWN No.: C-10110101627

DIST ———
DIST ———

Rev.	Revision record.	Date.
1	NEW	2016/04/14

Top-Link Electronics Ltd.
TOLERANCES UNLESS OTHER SPECIFIED
0. = ± —
0.0 = ± 0.15
0.00 = ± 0.10
0.000= ± —
Angle: ±1°
SURF TEXTURE:
REMOVE BURRS.
BREAK SHARP EDGES
R0.05 MAX.DO NOT SCALE PRINT.

Type: Customer drawing	Unit: mm	Weight: ———	
DWN: Caiwanlu	APVD:	top-link Electronics Top-Link Electronics Ltd.	
CHK:	REL:		
Name: Pogo pin connector			
Scale: 1:1	Size: A4	DWG No.: C-10110101627	Page: 1/1	Rev.: 1

10110101627
PART NUMBER