





THIS INFORMATION IS CONFIDENTIAL AND IS DISCLOSED TO YOU ON CONDITION THAT NO FURTHER DISCLOSURE IS MADE BY YOU TO OTHER THAN TOP-LINK PERSONNEL WITHOUT WRITTEN AUTHORIZATION FROM TOP-LINK LTD.

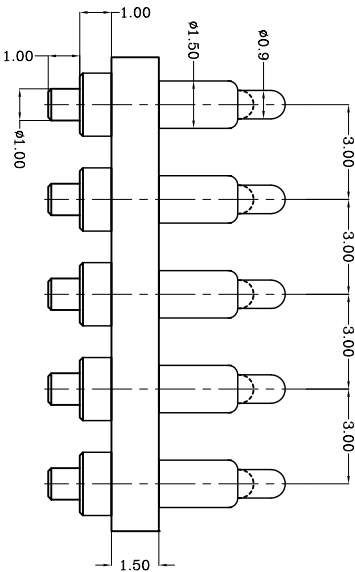

DWG NO.
C-110633

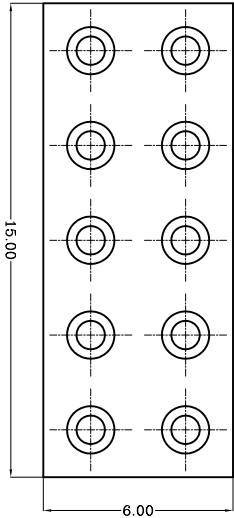

TOP-LINK

Notes:

Material(材质):

Housing: High temp.Plastic, UL94 V-0 Color Black.

Contact: C36000 & C27000

Spring : Stainless steel wire

2 Plating:

1)Body: Min 0.1um Gold plating over min. 1.4um Nickel plating

(Body: 镀金0.1um Min 镀底1.4um Min)

2)Plunger: Min 0.4um Gold plating over min. 1.4um Nickel plating

(Plunger: 镀金0.4um Min 镀底1.4um Min)

3 Mechanical:

Total stroke(总行程): 1.50mm

Durability(寿命): 10,000 cycle min.

4 Electrical(电性能)

Contact resistance(接触阻抗): 30mOhm Max.

Voltage rating(额定电压): 36V DC Max

Current rating(额定电流): 2.0A

USED ON

-

110633-10

PART NUMBER

A

B

C

D

LDC
-
DIST
-

更改PIN		2010/09/29
NEW		2010/09/03
REVISION		
RECORD		
APVD		
DATE		

DIMENSIONS IN MM			
TOLERANCES UNLESS			
OTHER SPECIFIED			
0	= ±		
0.0	= ±0.15		
0.00	= ±0.10		
0.000	= ±		
ANGLE: ±1°			
SURF TEXTURE: 32/			
REMOVE BURRS, BREAK			
SHARP EDGES R0.05 MAX			
DO NOT SCALE PRINT			
MATL	1	HT TR	—
DWN	LED	APVD	
CHK		REL	
NAME	POGD PIN CONNECTOR 10 POSITIONS		
SCALE	1:1	A4	DWG
		ND.	C-110633
			SHEET
			1 OF 1
			REV
			B

Top-Link
Electronics Ltd.