

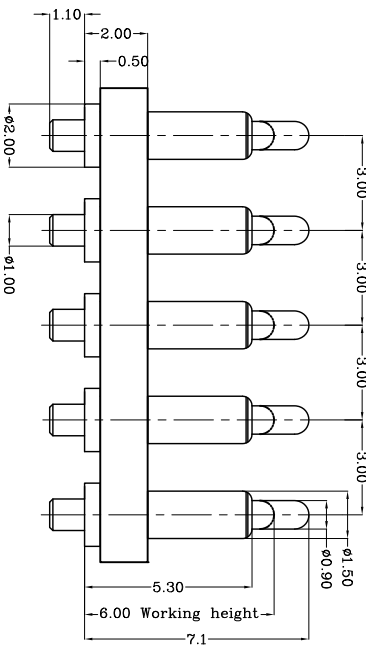


DWG NO. C-110849

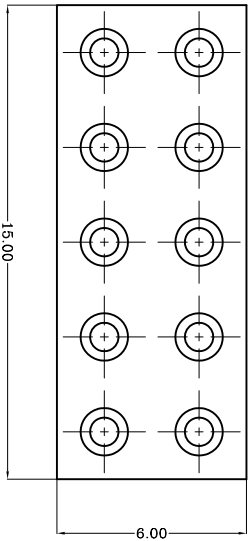

TOP-LINK

力量/工作高度对照表	
高度 (mm)	力量 (gf)
工作高度: 6.0mm	90gf min

1 Material(材质):

Housing: High temp. Plastic, UL94 V-0 Color Black.

Contact: Brass

Spring :Stainless steel wire

2 Plating:

1)Body: Mirr 0.1um Gold plating over min. 1.4um Nickel plating (Body: 鍍金0.1um Min 鍍底1.4um Min)
2)Plunger: Min 0.4um Gold plating over min. 1.4um Nickel plating (Plunger: 鍍金0.4um Min 鍍底1.4um Min)

3 Mechanical:

Durability(寿命): 10,000 cycle min.

4 Electrical (电性能)

Contact resistance(接触抵抗): 30mOhm Max

Voltage rating(额定电压): 36V DC Max

Current rating(额定电流): 2.0A

[illegible]

USED ON

110849-10

PART NUMBER

A



D