





THIS INFORMATION IS CONFIDENTIAL AND IS DISCLOSED TO YOU ON CONDITION THAT NO FURTHER DISCLOSURE IS MADE BY YOU TO OTHER THAN TOP-LINK PERSONNEL WITHOUT WRITTEN AUTHORIZATION FROM TOP-LINK LTD.

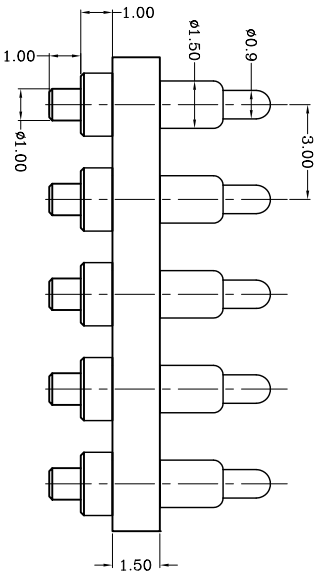

DWG NO.
C-110850

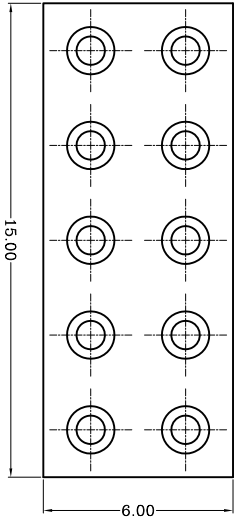

TOP-LINK

Notes:

Material(材质):

Housing: High temp.Plastic, UL94 V-0 Color Black.
Contact: C36000 & C27000
Spring : Stainless steel wire

2 Plating:

1)Body: Min 0.1um Gold plating over min. 1.4um Nickel plating
(Body: 镀金0.1um Min 镀底1.4um Min)
2)Plunger: Min 0.4um Gold plating over min. 1.4um Nickel plating
(Plunger: 镀金0.4um Min 镀底1.4um Min)

3 Mechanical:

Total stroke(总行程): 1.50mm
Durability(寿命): 10,000 cycle min.

4 Electrical(电性能)

Contact resistance(接触阻抗): 30mOhm Max.
Voltage rating(额定电压): 36V DC Max
Current rating(额定电流): 2.0A

USED ON
-

110850-10

PART NUMBER

A

B

C

D

LDC
-
DIST
-

更新			
更换PIN			
NEW			
REVISION			
RECORD			
L TR			

DIMENSIONS IN MM				TOLERANCES UNLESS OTHER SPECIFIED			
0	= ±			0.0	= ±0.15		
0.00	= ±0.10			0.000	= ±		
0.000	= ±			ANGLE: ±1°			
SURF TEXTURE: 32/				REMOVE BURRS, BREAK			
SHARP EDGES R0.05 MAX				DD NOT SCALE PRINT			
MATL	1	HT	TR	FIN			
DWN	APVD						
CHK	REL						
NAME	POGD PIN CONNECTOR 10 POSITIONS						
SCALE	1:1	A4	DWG	ND.	C-110850		
SHEET	1	DF	1	REV	C		