
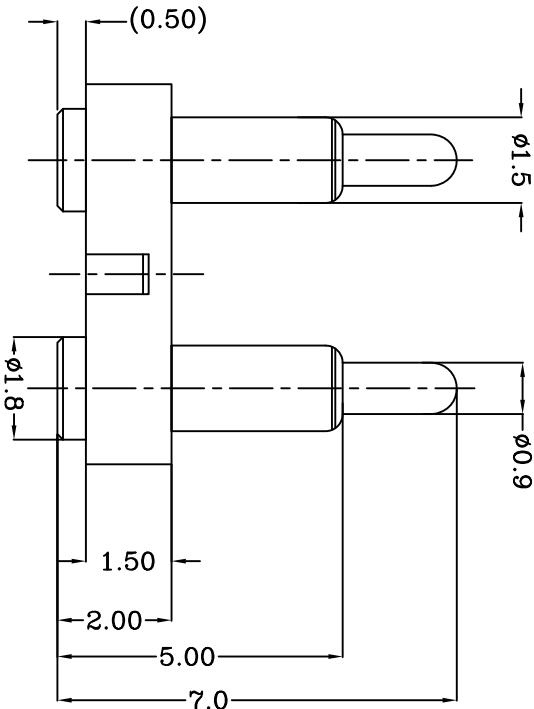
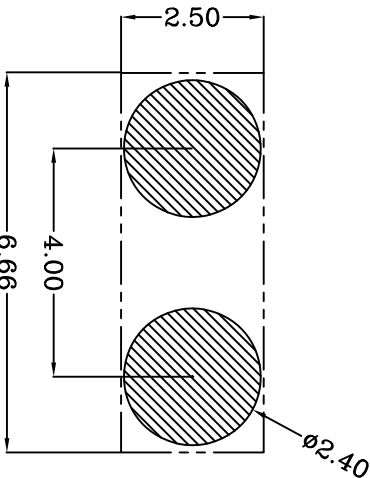
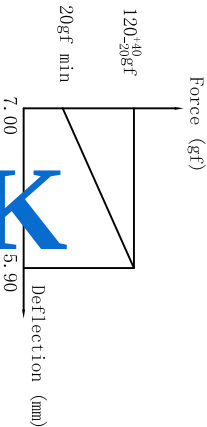


DWG NO.

C-100052

THIS INFORMATION IS CONFIDENTIAL AND IS DISCLOSED TO YOU ON CONDITION THAT NO FURTHER DISCLOSURE IS MADE BY YOU TO OTHER THAN TOP-LINK PERSONNEL WITHOUT WRITTEN AUTHORIZATION FROM TOP-LINK LTD.

LOC	-
DIST	-

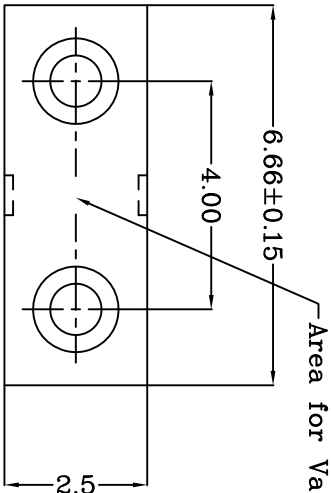

TOP-LINK

Notes:

- 1 Material, Housing: PA 4,6 (30% Glass Filled)
Color Black.
- 2 Mechanical demands:
Plating Plunger: Au plating over Ni plating
Plating Body: Au plating over Ni plating
- 3 Mechanical
1) Total stroke : 2.0mm
2) Durability: 10,000 cycle min.
- 4 Electrical
1) Contact resistance: 30mOhm Max.
2) Operating voltage: 36VDC MAX.
- 5 Packing: Reel Tape

DIMENSIONS IN MM TOLERANCES UNLESS OTHER SPECIFIED	
0	= ± .05
0.0	= ± 0.15
0.00	= ± 0.10
0.000	= ± .005
ANGLE:	± 1°
SURF TEXTURE:	3.2/
REMOVE BURRS	· BREAK
SHARP EDGES NO.05 MAX	
DO NOT SCALE PRINT	

MATL	1	HT TR	—	FIN	—	—
DWG	Qin	AWD	Launsing	Top-Link Electronics Ltd.	Top-Link Electronics Ltd.	100052-2
CHK	Jin	REL				
NAME	BATTERY POGO CONNECTOR 2 POSITIONS PGC-1.5-7.0-R-2P-4.0PH					
SCALE	1:1	A4	DWG NO.	C-100052	SHEET 1 OF 1	REV 2

4

3

2

1