

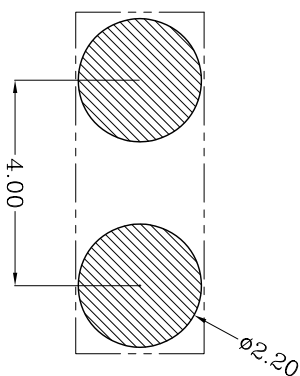


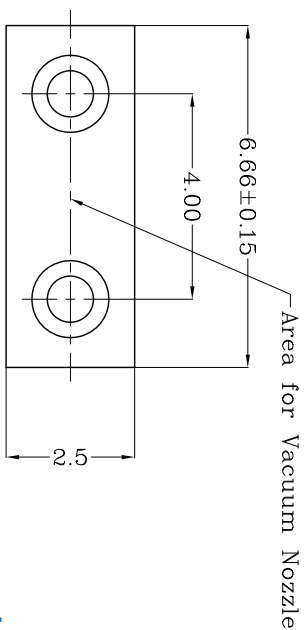

Recommended solder patse thickness is 0.10 mm
Recommended PCB Layout

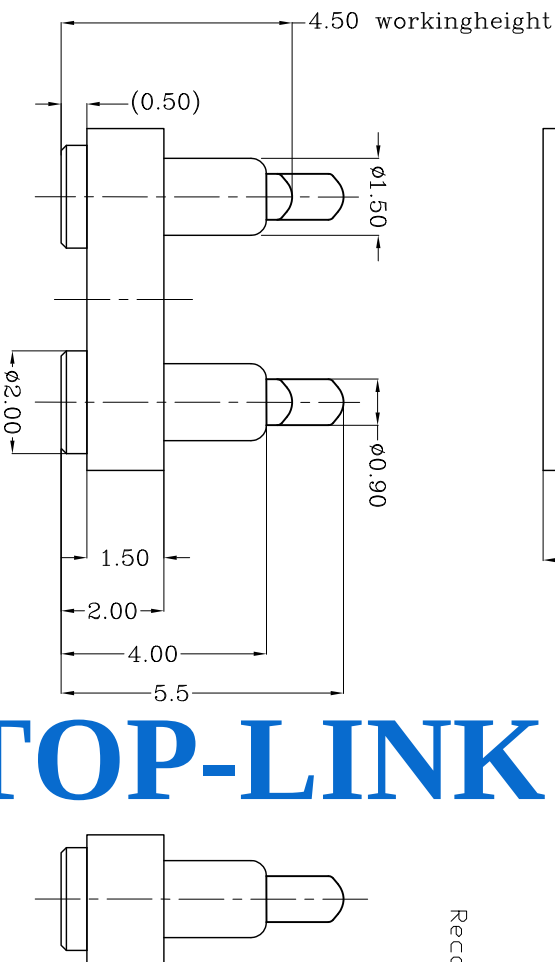

TOP-LINK

Notes:

1 Material (材質):
Housing: PA 46 (30% Glass Filled) Color Black
Contact: Brass
Spring : Stainless steel wire

2 Plating: Min 0.1um Gold plating over min. 1.4um Nickel plating
1)Body: 镀金0.1um Min 镍底1.4um Min)
2)Plunger: Min 0.4um Gold plating over min. 1.4um Nickel plating
(Plunger: 镀金0.4um Min 镍底1.4um Min)

LDC			ANGLE: 1°	NAME	PGGD CONNECTOR 2 POSITIONS
-	update remark	2007/12/26	SURF TEXTURE: 32/ V	DWG	PGC-1.5-5.5-R-2P-4.0PH
DIST	LTR	REVISION RECORD	APVD	SCALE	SHEET
-			DATE	1:1	1 OF 1
			REMOVE BURRS, BREAK SHARP EDGES R0.05 MAX DO NOT SCALE PRINT	A4	REV
				NO. C-100155	A

USED ON
1

100155-2
PART NUMBER

MATL		HT TR	—	FIN	—	<i>A</i>
DWN		APVD	<i>Top-Link</i> <u>Electronics</u> Top-Link Electronics Ltd			
QIN						
CHK		REL				

ANGLE: 11°
SURF TEXTURE: 3.2/
REMOVE BURRS, BREAK
SHARP EDGES R0.05 MAX
DO NOT SCALE PRINT