





THIS INFORMATION IS CONFIDENTIAL AND IS DISCLOSED TO YOU ON CONDITION THAT NO FURTHER DISCLOSURE IS MADE BY YOU TO OTHER THAN TOP-LINK PERSONNEL WITHOUT WRITTEN AUTHORIZATION FROM TOP-LINK LTD.

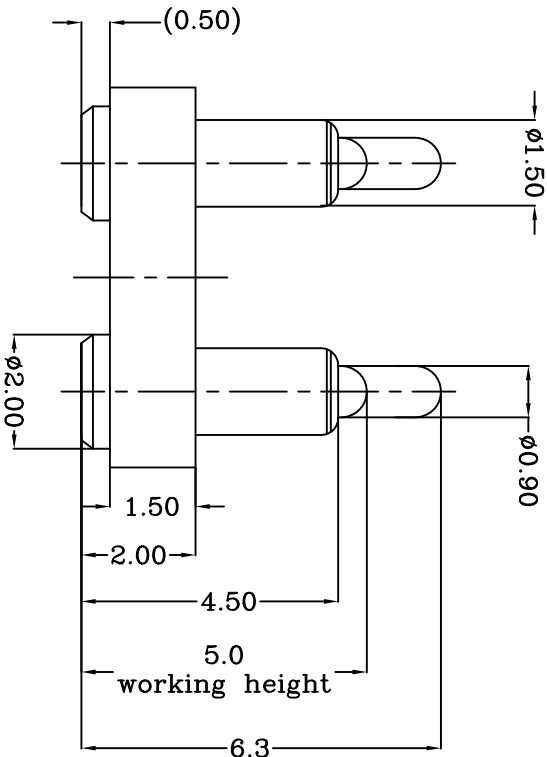

DWG NO.
C-100203

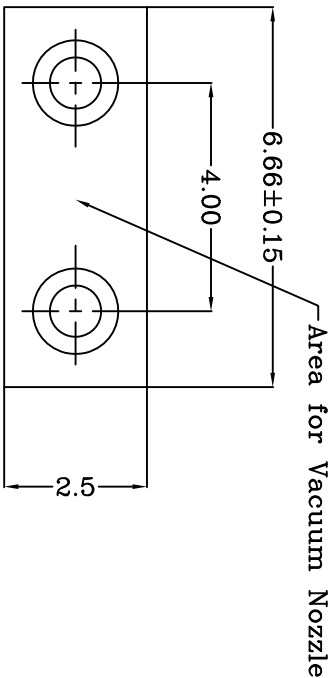

TOP-LINK

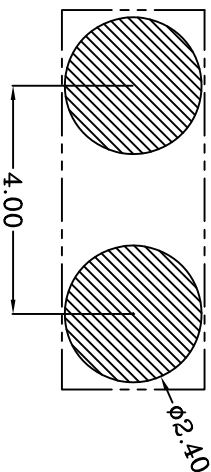

Recommended PCB Layout

Notes:
1 Material, Housing: PA 4.6 (30% Glass Filled)
Color: Black.

Contact: Brass

2 Mechanical demands:
Plating Plunger: Min. 0.4um Au over 1.25um Ni
Plating Body: Min. 0.1um Au over 1.25um Ni.

3 Mechanica
1)Force: 90gf min per pin at 1.3mm stroke
2)Total stroke : 1.60mm
3)Durability: 10,000 cycle min.

DIMENSIONS IN MM
TOLERANCES UNLESS
OTHER SPECIFIED

0 = ±
0.0 = ±0.15
0.00 = ±0.10
0.000 = ±
ANGLE: ±1°

SURF TEXTURE: 32/
REMOVE BURRS, BREAK
SHARP EDGES R0.05 MAX
DO NOT SCALE PRINT

MATL	HT	TR	FIN
DWN	APVD	—	—
Benny	Lansing		
CHK	REL		
Andy			

Top-Link
Electronics Ltd.

NAME BATTERY POGO CONNECTOR 2 POSITIONS
PGC-1.5-6.3-R-2P-4.0PH

SCALE 1:1 A4 DWG NO. C-100203

LDC
DIST

取消倒角	2007/12/04
REVISION	
RECORD	
APVD	
DATE	

4

3

2

1

USED ON

—

100203-2
PART NUMBER