
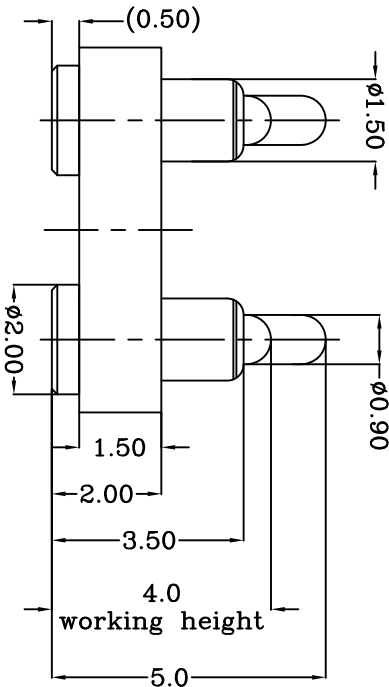
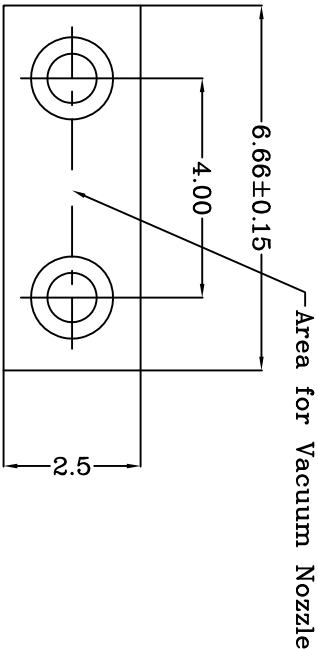



Recommended solder patse thickness is 0.10 mm
Recommended PCB Layout

TOP-LINK

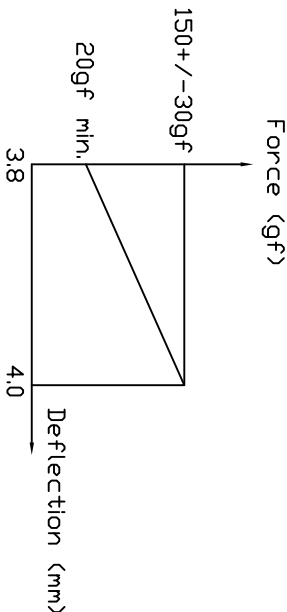

- Notes:
- 1 Material, Housing: PA 4.6 (30% Glass Filled)
Color Black.
 - 2 Mechanical demands:
Contact: Brass
Plating Plunger: 0.4um Au over 1.4um Ni
Plating Body: 0.1um Au over 1.4um Ni.

USED ON

-

LDC	-
DIST	-

update remark	2007/12/26
REVISION	
RECORD	
APVD	
DATE	

DIMENSIONS IN MM TOLERANCES UNLESS OTHER SPECIFIED			
0	= ±		
0.0	= ±0.15		
0.00	= ±0.10		
0.000	= ±		
ANGLE: ±1°			
SURF TEXTURE: 32/			
REMOVE BURRS, BREAK			
SHARP EDGES R0.05 MAX			
DD NOT SCALE PRINT			
MATL	△	HT TR	—
DWN	Benny	APVD	Lansing
CHK	Andy	REL	Top-Link Electronics Ltd.
NAME	BATTERY POGO CONNECTOR 2 POSITIONS		
SCALE	1:1	A4	DWG NO. C-100219
SHEET	1 OF 1	REV	C

100219-2
PART NUMBER

FIN — V