
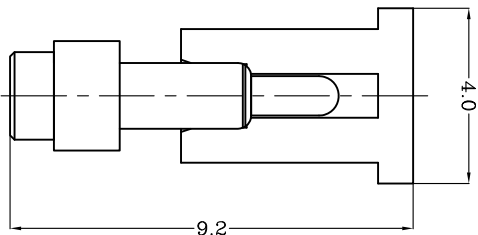
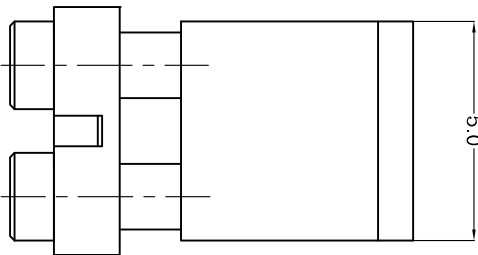
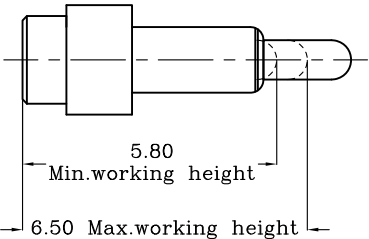


Recommended solder paste thickness is 0.10 mm
Recommended PCB Layout

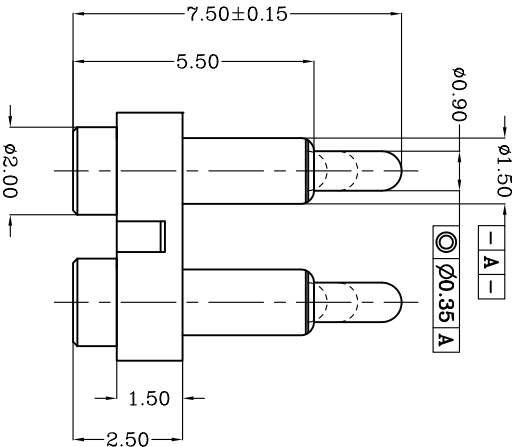

Notes:

- 1 Dimensions shall be interpreted per ASME Y14.5M.
- 2 Mechanical performance(See the table 1)
<2.1>The force is the average of forces obtained when plunger goes downwards and upwards.
- <2.2>Warning: Working height are not permitted to be less than Min working height.
- 3 Electrical performance
Resistance: 30mOhm Max.
Current rating: 2.0A
- 4 Packaging specification conforms to EIA 481
- 5 RoHS compliant.

TOP-LINK

Table 1 Mechanical performance

Max.working height	6.50mm	80gf min<2.1>
Min.working height	5.80mm	165±35
Durability	10000cycle	

100263-2

PART NUMBER

Type	Unit	Weight
Customer drawing	mm	

Top-Link Electronics Ltd.

DWN: Cai wanlu

APVD:

TOP-LINK Electronics

Top-Link Electronics Ltd.

Name	Scale	Size	DWG No.	Page	Rev.
Pogo pin connector	1:1	A4	C-100263	1/1	A1

CHK:

REL:

TOP-LINK Electronics

Top-Link Electronics Ltd.

Item	Part name	Q'ty/Ed	Material	Finish
1	HSG	1	High temp.Plastic UL94 V-0 Color Black	
2	Body	2	Leaded Brass	Gold plating over Nickel plating
3	Plunger	2	Leaded Brass	Gold plating over Nickel plating
4	Spring	2	Stainless steel wire	
5	CAP	1	High temp.Plastic UL94 V-0 Color Black	

Rev.	Update	Date.
A1	NEW	2007/12/25
Rev.	Revision record.	