

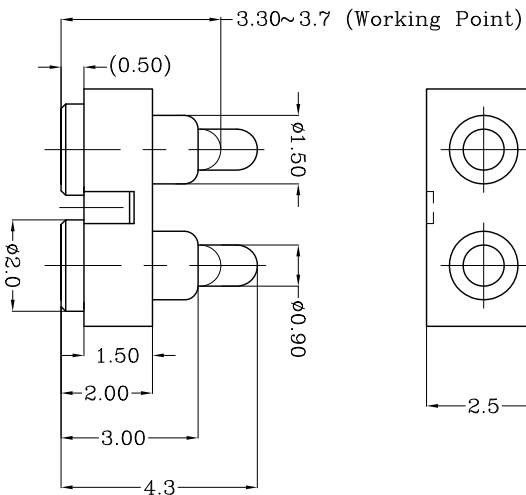

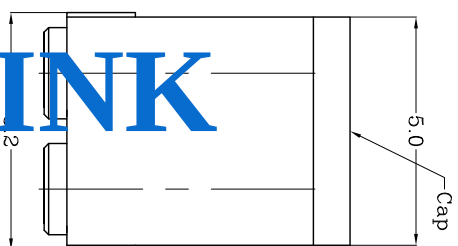


Recommended solder paste thickness is 0.10 mm

Recommended PCB Layout

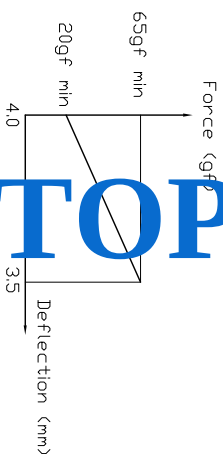

Cap for Vacuum Nozzle

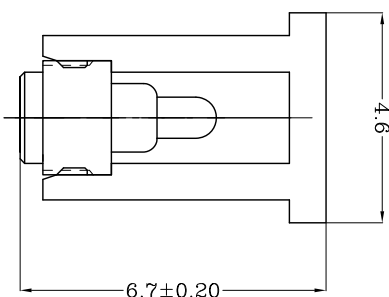

TOP-LINK

Notes:

¹ Material, Housing: PA 4.6 (30% Glass Filled)

Color Black.

Contact: Brass

2 Mechanical demands:

Plating Plunger: 0.4um Au over 1.4um Ni

Plating Body: 0.1um Au over 1.4um Ni

	更新PCB尺寸		2010/07/12
	NEW		2008/12/02
LTR	REVISION RECORD	APVD	DATE

DIMENSIONS IN MM TOLERANCES UNLESS OTHER SPECIFIED		MATL	HT TR	FIN
0	= $\pm$ -		—	
0.0	= $\pm$ 0.15			
0.00	= $\pm$ 0.10			
0.000	= $\pm$	DWN	APVD	 Top-Link Electronics Ltd
	ANGLE: $\pm$ 1°	Qln	REL	
SURF TEXTURE: 32/ REMOVE BURRS, BREAK SHARP EDGES R0.05 MAX DO NOT SCALE PRINT		NAME BATTERY POGO CONNECTOR 2 POSITIONS PGC-1.5-4.3-R-2P-2.54PH		
SCALE	A4	DWG NO.	C-100266	SHEET 1 OF 1
	1:1			REV B

100266-2
PART NUMBER