
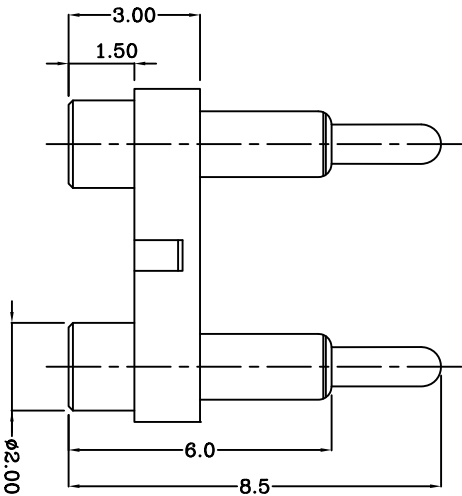
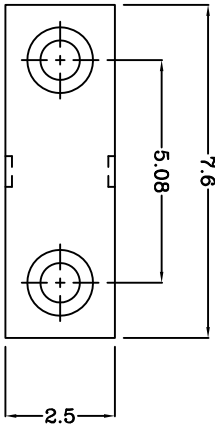



TOP-LINK

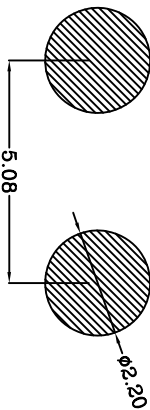

Recommended PCB Layout
Recommended solder paste thickness is 0.10 mm

Notes:
1 Material, Housing: PA 4,6 (30% Glass Filled)
Color: Black. (UL94V-0)

2 Mechanical demands:
Contact: Brass
Plating plunger: 0.4µm Au over 1.4µm Ni
Plating body: 0.1µm Au over 1.4µm Ni
Force is 125±30gf at 1.0 mm stroke.

USED ON

-

100271-2

PART NUMBER

HT TR

-

FIN

-

✓

MATL
DWN
QIN
CHK
JIN
NAME
SCALE
1:1
A4
NO.
C-100271
SHEET
1 OF 1
REV
A

BATTERY CONNECTOR 2 POS.
PGC-1.5-8.5-R-2P-508PH

APVD

Lansing

REL

Top-Link
Electronics Ltd.

Top-Link
Electronics Ltd.

A

DIMENSIONS IN MM
TOLERANCES UNLESS
OTHER SPECIFIED
0 = ±
0.0 = ±0.15
0.00 = ±0.10
0.000 = ±
ANGLE: ±1°
SURF TEXTURE: 32/
REMOVE BURRS, BREAK
SHARP EDGES R0.05 MAX
DO NOT SCALE PRINT

NEW
REVISION
RECORD
APVD
DATE

8006/01/08

LTR

4

3

2

1