




DWG NO. C-100300

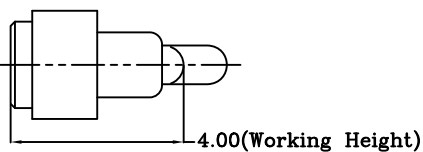

Recommended PCB Layout

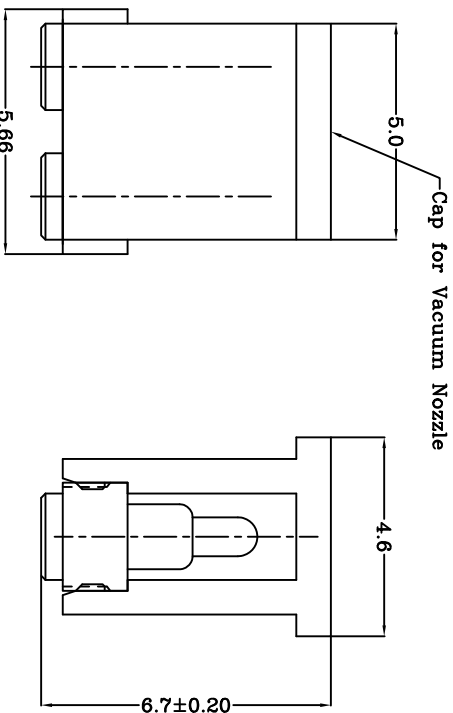

TOP-LINK

2)Plunger: Min 0.4um Gold plating over min. 1.4um Nickel plating
(Plunger: 鍍金0.4um Min 鍍底1.4um Min)

Durability(寿命): 10,000 cycle min.

Current rating(额定电流): 2.0A

[illegible]

DIMENSIONS IN MM TOLERANCES UNLESS OTHER SPECIFIED				MATL		HT TR	—	FIN	— 
0	= ±		DVN		APVD	 Top-Link Electronics Ltd.			
0.0	= ±0.15		Qin						
0.00	= ±0.10		CHK		REL				
0.000	= ±0.05								
ANGLE: ±1°									
SURF TEXTURE: 3.2/√									
REMOVE BURS, BREAK									
SHARP EDGES R0.05 MAX									
DO NOT SCALE PRINT									
			NAME		PGO G CONNECTOR 2 POSITIONS				
					PGC-1.5-5.0-R-2P-3.0PH				
SCALE			A4		DWG	C-100300		SHEET	REV
1:1					IND.			1 OF 1	A

100300-2
PART NUMBER

USED ON