
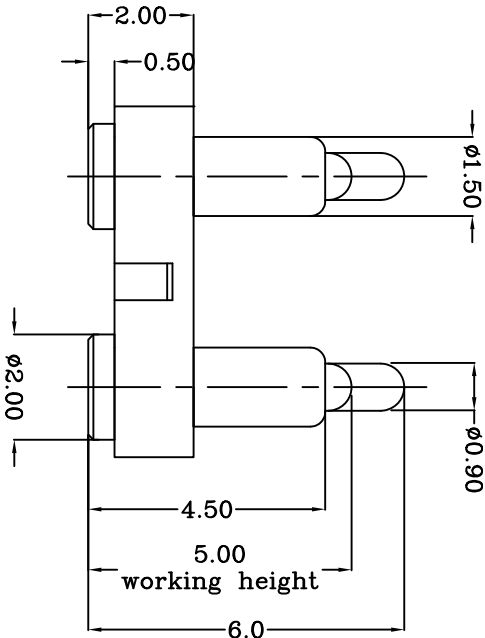



DWG NO.
C-100575

THIS INFORMATION IS CONFIDENTIAL AND IS DISCLOSED TO YOU ON CONDITION THAT NO FURTHER DISCLOSURE IS MADE BY YOU TO OTHER THAN TOP-LINK PERSONNEL WITHOUT WRITTEN AUTHORIZATION FROM TOP-LINK LTD.

LDC	-
DIST	-

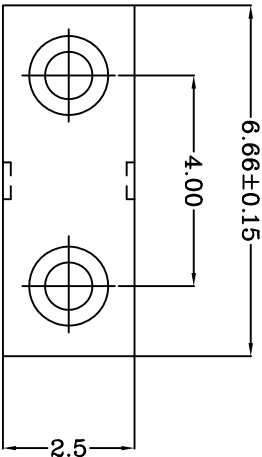

TOP-LINK

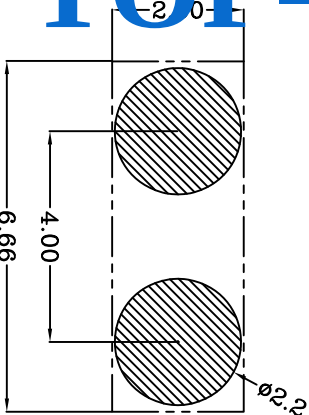

Recommended PCB Layout

Notes:
△ Material(材质):

- 1)Body : Brass
- 2)Plunge : Stainless steel wire
- 3)Spring : Stainless steel wire
- 4)Plating(电镀):

- 1)Body: Min 0.1um Gold plating over min. 1.4um Nickel plating (Body: 镀金0.1um Min 镍底1.4um Min)
- 2)Plunger: Min 0.4um Gold plating over min. 1.4um Nickel plating (Plunger: 镀金0.4um Min 镍底1.4um Min)
- 3)Mechanical(机械性能):
 - 1)Force: 90gf Min per pin at 1.0mm stroke (力: 下压1.0mm的力: 90gf Min)
 - 2)Total stroke(总行程) : 1.50mm
 - 3)Durability(寿命): 10,000 cycle min.
- 4)Electrical(电性能)
 - 1)Contact resistance(接触抵抗): 30mOhm Max.
 - 2)Voltage rating(额定电压): 36V DC Max
 - 3)Current rating(额定电流): 2.0A

DIMENSIONS IN MM TOLERANCES UNLESS OTHER SPECIFIED				MATERIAL				HT TR				FIN			
0	= ±			△	1										
0.0	= ±0.15			DWN	QIN	APVD									
0.00	= ±0.10			CHK		REL									
0.000	= ±														
ANGLE: ±1°				NAME				PGGD CONNECTOR 2 POSITIONS				SHEET			
SURF TEXTURE: 32/				SCALE				1:1				1 OF 1			
REMOVE BURRS, BREAK				A4				ND				REV			
SHARP EDGES R0.05 MAX				C-100575				C-100575				1			
DO NOT SCALE PRINT				PGC-1.5-6.0-R-2P-4.0PH				C-100575				1			

USED ON

-

100575-2

PART NUMBER

Top-Link
Electronics L td.