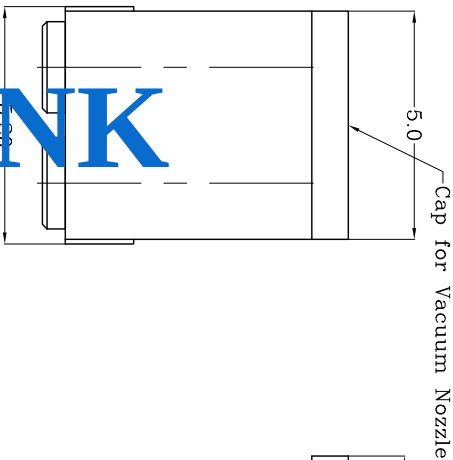
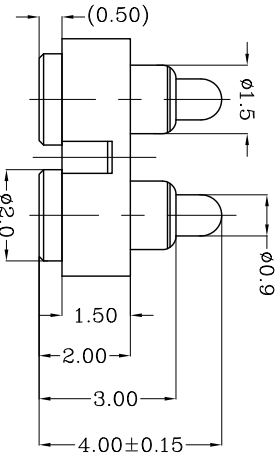




TOP-LINK

Recommended PCB Layout

Table 1 Mechanical performance		
Max working height	3.50mm	110±25gf <2.1>
Min working height	3.20mm	140±35
Durability	10000cycle	

Notes:
1 Material(材质):

Housing: PA 4.6 (30% Glass Filled) Color Black.
Contact: Brass
Spring :Stainless steel wire

2 Plating:

1)Body: Min 0.1um Gold plating over min. 1.4um Nickel plating
(Body: 镀金0.1um Min 镍底1.4um Min)
2)Plunger: Min 0.4um Gold plating over min. 1.4um Nickel plating
(Plunger: 镀金0.4um Min 镍底1.4um Min)

3 Mechanical:

Total stroke(总行程): 0.90mm
Durability(寿命): 10,000 cycle min.

LDC
-
DIST
-

NEW		2010/02/23
REVISION		
RECORD		
APVD		
DATE		

DIMENSIONS IN MM	
TOLERANCES UNLESS	
OTHER SPECIFIED	
0	= ± -
0.0	= ±0.15
0.00	= ± 0.10
0.000	= ±
ANGLE: ±1°	
SURF TEXTURE: 32/	
REMOVE BURRS, BREAK	
SHARP EDGES R0.05 MAX	
DO NOT SCALE PRINT	

MATL	HT TR	FIN
DWN	APVD	
CHK	REL	
NAME	PGGD CONNECTOR 2 POSITIONS	
SCALE	1:1	
A4	DWG	
ND.	C-100593	
SHEET	1 OF 1	
REV	A	

100593-2
PART NUMBER

Top-Link
Electronics L td.

USED ON

-