THIS INFORMATION IS CONFIDENTIAL AND IS DISCLOSED TO YOU ON CONDITION THAT NO FURTHER DISCLOSURE IS MADE BY YOU TO OTHER THAN TOP-LINK PERSONNEL WITHOUT WRITTEN AUTHORIZATION FROM TOP-LINK LTD.

DWG NO. C-100620

USED ON
—



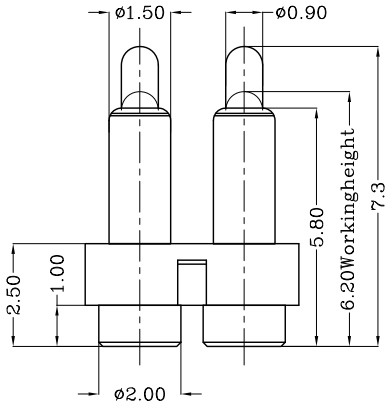



Recommended PCB Layout

Recommended solder patse thickness is 0.10 mm

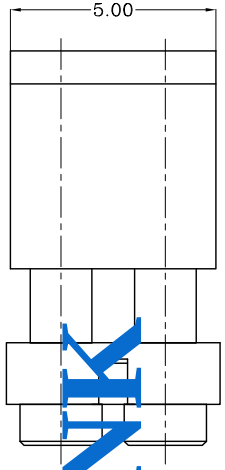

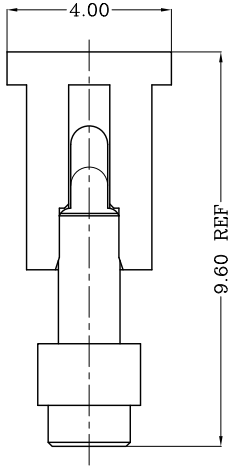

TOP-LINK

Notes:

1 Material(材质):
Housing: PA 4.6 (30% Glass Filled) Color Black.
Contact: Brass
Spring :Stainless steel wire

2 Plating:
(Body: Min 0.1um Gold plating over min. 1.4um Nickel plating
(Body: 镀金0.1um Min 镍底1.4um Min)
2)Plunger: Min 0.4um Gold plating over min. 1.4um Nickel plating
(Plunger: 镀金0.4um Min 镍底1.4um Min)

3 Mechanical:
Total stroke(总行程): 1.40mm
Durability(寿命): 10,000 cycle min.

4 Electrical(电性能)
Contact resistance(接触抵抗): 30mOhm Max.
Voltage rating(额定电压): 36V DC Max
Current rating(额定电流): 2.5A

100620-2	
PART NUMBER	

DIMENSIONS IN MM TOLERANCES UNLESS OTHER SPECIFIED 0 = ±- 0.0 = ±0.15 0.00 = ±0.10 0.000 = ± ANGLE: ±1° SURF TEXTURE: 3.2 REMOVE BURRS. BREAK SHARP EDGES R0.05 MAX DO NOT SCALE PRINT	MATL 1	HT TR —	FIN — √
	DWN Qin	APVD	top-link Electronics Top-Link Electronics Ltd.
	CHK	REL	
	NAME	POGO PIN CONNECTOR 2 POSITIONS PGC-1.5-7.3-R-2P-2.54PH	
	SCALE 1:1	A4 DWG NO. C-100620	SHEET 1 OF 1 REV 1

LOC	DIST
-	-

LTR	REVISION RECORD	APVD	DATE
	NEW		2010/05/06

4 3 2 1

D C B A