






THIS INFORMATION IS CONFIDENTIAL AND IS DISCLOSED TO YOU ON CONDITION THAT NO FURTHER DISCLOSURE IS MADE BY YOU TO OTHER THAN TOP-LINK PERSONNEL WITHOUT WRITTEN AUTHORIZATION FROM TOP-LINK LTD.

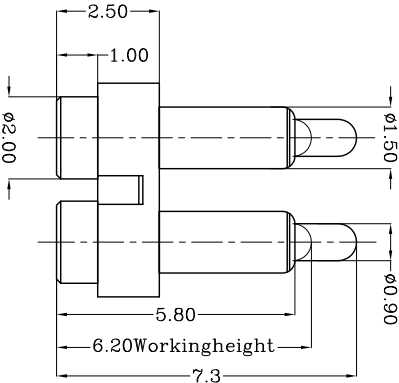

DWG NO.
C-100620



Recommended PCB Layout
Recommended solder patse thickness is 0.10 mm

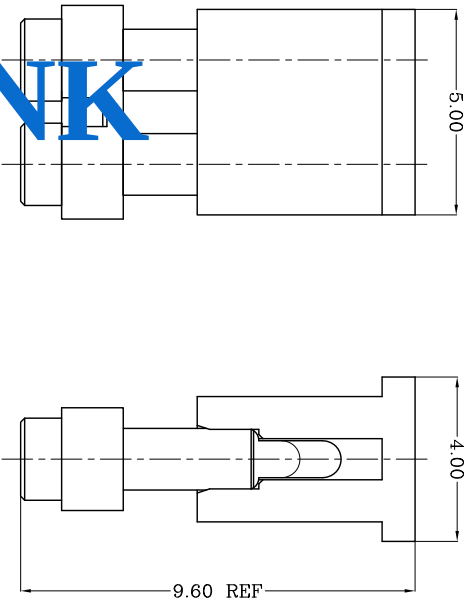

Notes:
1. Material (材质): PA 4.6 (30% Glass Filled) Color Black.
2. Plating (电镀): Min 0.1um Gold plating over min. 1.4um Nickel plating (电镀: 镀金0.1um Min 镀底1.4um Min)
3. Plunger (柱塞): Min 0.4um Gold plating over min. 1.4um Nickel plating (柱塞: 镀金0.4um Min 镀底1.4um Min)
4. Electrical (电性能)
5. Contact resistance (接触电阻): 30mOhm Max.
6. Voltage rating (额定电压): 36V DC Max
7. Current rating (额定电流): 2.5A

Notes:
1. Material (材质): PA 4.6 (30% Glass Filled) Color Black.
2. Plating (电镀): Min 0.1um Gold plating over min. 1.4um Nickel plating (电镀: 镀金0.1um Min 镀底1.4um Min)
3. Plunger (柱塞): Min 0.4um Gold plating over min. 1.4um Nickel plating (柱塞: 镀金0.4um Min 镀底1.4um Min)
4. Electrical (电性能)
5. Contact resistance (接触电阻): 30mOhm Max.
6. Voltage rating (额定电压): 36V DC Max
7. Current rating (额定电流): 2.5A

Notes:
1. Material (材质): PA 4.6 (30% Glass Filled) Color Black.
2. Plating (电镀): Min 0.1um Gold plating over min. 1.4um Nickel plating (电镀: 镀金0.1um Min 镀底1.4um Min)
3. Plunger (柱塞): Min 0.4um Gold plating over min. 1.4um Nickel plating (柱塞: 镀金0.4um Min 镀底1.4um Min)
4. Electrical (电性能)
5. Contact resistance (接触电阻): 30mOhm Max.
6. Voltage rating (额定电压): 36V DC Max
7. Current rating (额定电流): 2.5A

Notes:
1. Material (材质): PA 4.6 (30% Glass Filled) Color Black.
2. Plating (电镀): Min 0.1um Gold plating over min. 1.4um Nickel plating (电镀: 镀金0.1um Min 镀底1.4um Min)
3. Plunger (柱塞): Min 0.4um Gold plating over min. 1.4um Nickel plating (柱塞: 镀金0.4um Min 镀底1.4um Min)
4. Electrical (电性能)
5. Contact resistance (接触电阻): 30mOhm Max.
6. Voltage rating (额定电压): 36V DC Max
7. Current rating (额定电流): 2.5A

Notes:
1. Material (材质): PA 4.6 (30% Glass Filled) Color Black.
2. Plating (电镀): Min 0.1um Gold plating over min. 1.4um Nickel plating (电镀: 镀金0.1um Min 镀底1.4um Min)
3. Plunger (柱塞): Min 0.4um Gold plating over min. 1.4um Nickel plating (柱塞: 镀金0.4um Min 镀底1.4um Min)
4. Electrical (电性能)
5. Contact resistance (接触电阻): 30mOhm Max.
6. Voltage rating (额定电压): 36V DC Max
7. Current rating (额定电流): 2.5A

Notes:
1. Material (材质): PA 4.6 (30% Glass Filled) Color Black.
2. Plating (电镀): Min 0.1um Gold plating over min. 1.4um Nickel plating (电镀: 镀金0.1um Min 镀底1.4um Min)
3. Plunger (柱塞): Min 0.4um Gold plating over min. 1.4um Nickel plating (柱塞: 镀金0.4um Min 镀底1.4um Min)
4. Electrical (电性能)
5. Contact resistance (接触电阻): 30mOhm Max.
6. Voltage rating (额定电压): 36V DC Max
7. Current rating (额定电流): 2.5A

Notes:
1. Material (材质): PA 4.6 (30% Glass Filled) Color Black.
2. Plating (电镀): Min 0.1um Gold plating over min. 1.4um Nickel plating (电镀: 镀金0.1um Min 镀底1.4um Min)
3. Plunger (柱塞): Min 0.4um Gold plating over min. 1.4um Nickel plating (柱塞: 镀金0.4um Min 镀底1.4um Min)
4. Electrical (电性能)
5. Contact resistance (接触电阻): 30mOhm Max.
6. Voltage rating (额定电压): 36V DC Max
7. Current rating (额定电流): 2.5A

Notes:
1. Material (材质): PA 4.6 (30% Glass Filled) Color Black.
2. Plating (电镀): Min 0.1um Gold plating over min. 1.4um Nickel plating (电镀: 镀金0.1um Min 镀底1.4um Min)
3. Plunger (柱塞): Min 0.4um Gold plating over min. 1.4um Nickel plating (柱塞: 镀金0.4um Min 镀底1.4um Min)
4. Electrical (电性能)
5. Contact resistance (接触电阻): 30mOhm Max.
6. Voltage rating (额定电压): 36V DC Max
7. Current rating (额定电流): 2.5A

Notes:
1. Material (材质): PA 4.6 (30% Glass Filled) Color Black.
2. Plating (电镀): Min 0.1um Gold plating over min. 1.4um Nickel plating (电镀: 镀金0.1um Min 镀底1.4um Min)
3. Plunger (柱塞): Min 0.4um Gold plating over min. 1.4um Nickel plating (柱塞: 镀金0.4um Min 镀底1.4um Min)
4. Electrical (电性能)
5. Contact resistance (接触电阻): 30mOhm Max.
6. Voltage rating (额定电压): 36V DC Max
7. Current rating (额定电流): 2.5A

DIMENSIONS IN MM			
TOLERANCES UNLESS OTHER SPECIFIED			
0	= ±		
0.0	= ±0.15		
0.00	= ±0.10		
0.000	= ±		
ANGLE: ±1°			
SURF TEXTURE: 32/			
REMOVE BURRS. BREAK SHARP EDGES R0.05 MAX			
DD NOT SCALE PRINT			

LTR	REVISION	APVD	DATE	NAME	SCALE	A4	DWG	C-100620	SHEET	REV
	RECORD			PGGD	1:1		NO.		1 OF 1	1

4

3

2

1

USED ON

100620-2

PART NUMBER

Top-Link
Electronics Ltd.

PGC-1.5-7.3-R-2P-2.54PH

PGC-1.5-7.3-R-2P-2.54PH