
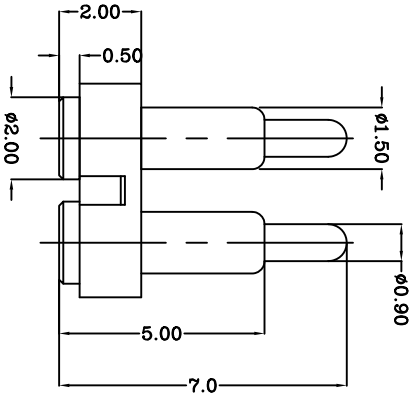


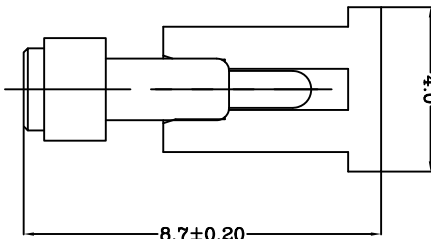


Recommended PCB Layout

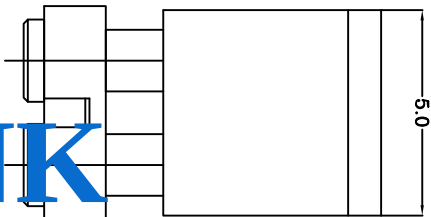

Notes:

1) Material(材料):
Housing: High temp. Plastic, UL94 V-0 Color Black.
Contact: Brass
Spring: Stainless steel wire

2 Plating:

1) Body: Min. 0.1um Gold plating over min. 1.4um Nickel plating (Body: 鍍金0.1um Min 鍍底1.4um Min)
2) Plunger: Min 0.4um Gold plating over min. 1.4um Nickel plating (Plunger: 鍍金0.4um Min 鍍底1.4um Min)

3 Mechanical:

Total stroke(总行程): 2.00mm
Durability(寿命): 10,000 cycle min.

4 Electrical(电性能)

Contact resistance(接触阻抗): 30mOhm Max.
Voltage rating(额定电压): 36V DC Max
Current rating(额定电流): 2.0A

USED ON

-

100644-2

PART NUMBER

DIMENSIONS IN MM		TOLERANCES UNLESS		OTHER SPECIFIED	
0	= ±	0.0	= ±0.15	0.00	= ±0.10
0.000	= ±	0.000	= ±	0.000	= ±

SURF TEXTURE:		ANGLE: ±1°		32/	
REMOVE BURRS, BREAK	SHARP EDGES R0.05 MAX	DD NOT SCALE	PRINT	NAME	PGGD CONNECTOR 2 POSITIONS
SCALE	1:1	A4	DWG	REL	PGC-1.5-7.0-R-2P-2.54PH

NAME	PGGD CONNECTOR 2 POSITIONS	PGC-1.5-7.0-R-2P-2.54PH
SCALE	1:1	A4
DWG	NO.	C-100644
SHEET	1 OF 1	REV A

NEW	REVISION	APVD	DATE
LTR	RECORD	APVD	DATE

LDC	-
DIST	-

4

3

2

1