
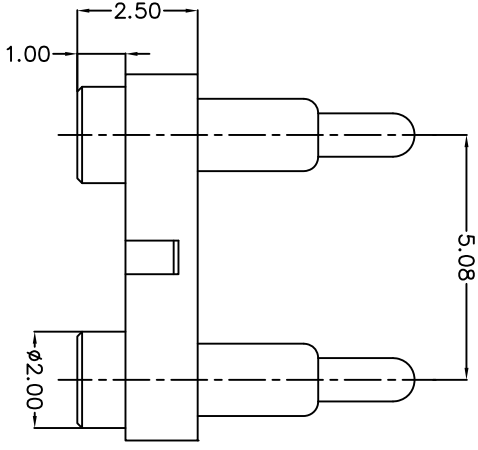
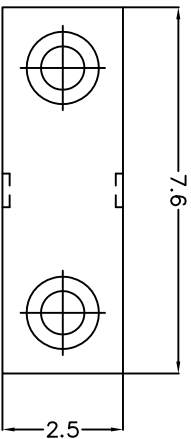
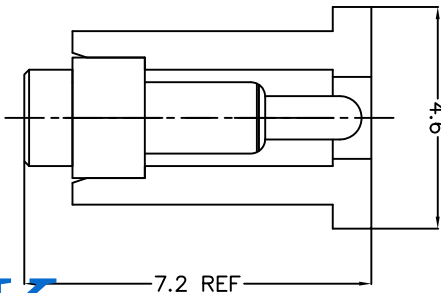
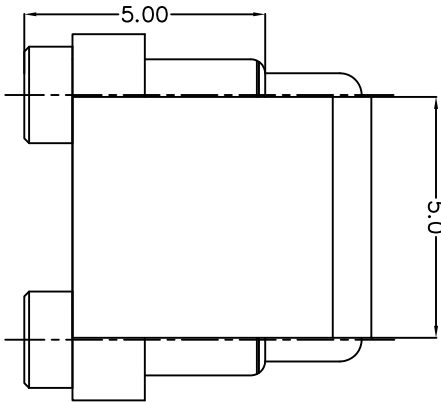


TOP-LINK

Notes:

- 1 Dimensions shall be interpreted per ASME Y14.5M.
- 2 Mechanical performance(See the table 1)
- 3.1>The force is the average of forces obtained when plunger goes downwards and upwards.
- 3 Electrical performance
- Resistance:100mOhm Max.Current rating: 1.0A
- 4 Packaging Spec.Comformance to EIA 481
- 5 RoHS compliant.

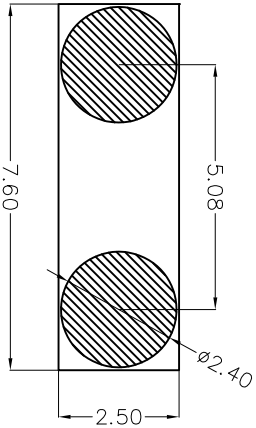

Recommended PCB Layout

Table 1 Mechanical performance		
Working height	6.00mm	25±15gf <2.1>
Durability	10000cycle	

Item	Part name	Q'ty/Ed	Material	Finish
1	HSG	1	High temp.Plastic UL94 V-0 Color Black	_____
2	Body	2	Leaded Brass	Gold plating over Nickel plating
3	Plunger	2	Leaded Brass	Gold plating over Nickel plating
4	Spring	2	Stainless steel wire	_____
5				

Top-Link Electronics Ltd.				
Type	Customer drawing	Unit	mm	Weight
DWG:		APVD:		
Qin Zuozhong				
CHK:		REL:		
TOLERANCES UNLESS OTHER SPECIFIED		Top-Link Electronics		
0.0 = ±0.15		Top-Link Electronics Ltd.		
0.00 = ±0.10				
0.000 = ±0.005				
SURF. TEXTURE:				
REMOVE BURRS.				
BREAK SHARP EDGES				
R0.05 MAX. DO NOT SCALE PRINT.				
Name		Customer drawing		
Scale	Size	DWG No.	Page	Rev.
1:1	A4	C-100743	1/1	A