
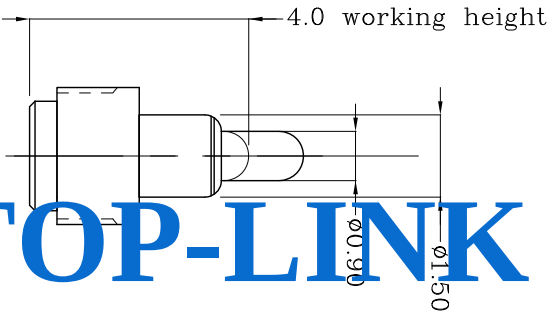

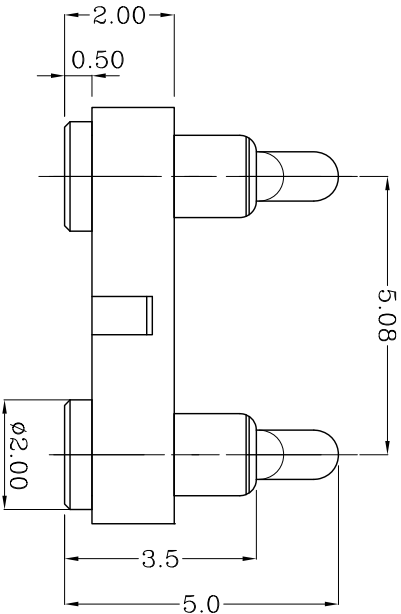


DWG NO.
C-110495

THIS INFORMATION IS CONFIDENTIAL AND IS DISCLOSED TO YOU ON CONDITION THAT NO FURTHER DISCLOSURE IS MADE BY YOU TO OTHER THAN TOP-LINK WITHOUT WRITTEN AUTHORIZATION FROM TOP-LINK ELECTRONICS FACTORY

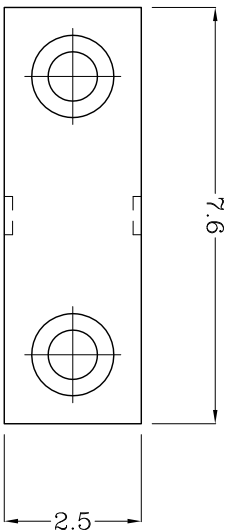

TOP-LINK

Notes:

1 Material, Housing: PA 4,6 (30% Glass Filled)


Color Black, (UL94V-0)

Contact: Brass

2 Mechanical demands:

Plating plunger: 0.4um Au over 1.4um Ni

Plating body: 0.1um Au over 1.4um Ni .

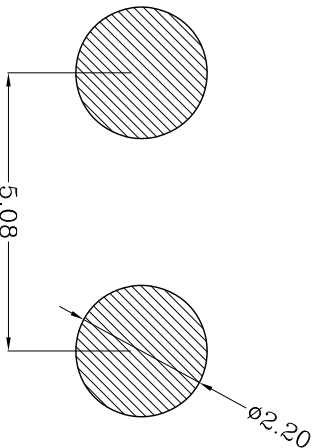

Recommended PCB Layout

Recommended solder paste thickness is 0.10 mm

LDC	-
DIST	-

L TR	NEW	REVISION RECORD	APVD	DATE
				0606/08/19

DIMENSIONS IN MM	MATL
TOLERANCES UNLESS	
OTHER SPECIFIED	
0 = ±	
0.0 = ±0.15	
0.00 = ±0.10	
0.000 = ±	
ANGLE: ±1°	
SURF TEXTURE: 32/	
REMOVE BURRS, BREAK	
SHARP EDGES R0.05 MAX	
DO NOT SCALE PRINT	

NAME	BATTERY CONNECTOR 2 PDS.	HT TR	FIN
SCALE	1:1	A4	DWG NO. C-110495
CHK	Jim	REL	
DWN	Qin	APVD	Lansing
MATL			

110495-2	PART NUMBER
----------	-------------

Top-Link
Electronics Ltd.

SHEET	REV
1 OF 1	A