






THIS INFORMATION IS CONFIDENTIAL AND IS DISCLOSED TO YOU ON CONDITION THAT NO FURTHER DISCLOSURE IS MADE BY YOU TO OTHER THAN TOP-LINK PERSONNEL WITHOUT WRITTEN AUTHORIZATION FROM TOP-LINK LTD.

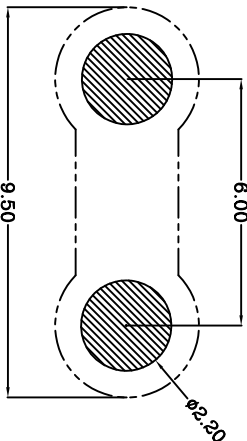

DWG NO.
C-110641

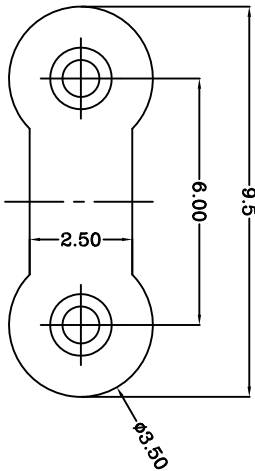


Recommended PCB Layout

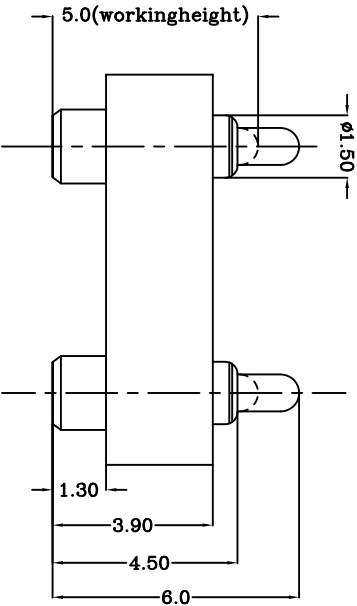

TOP-LINK

Notes:

- Material(材质):
Housing: PA 4.6 (30% Glass Filled) Color Black.
Contact: C36000 & C27000
Spring : Stainless steel wire
- Plating:
1)Body: Min 0.1um Gold plating over min. 1.4um Nickel plating (Body: 镀金0.1um Min 镍底1.4um Min)
2)Plunger: Min 0.4um Gold plating over min. 1.4um Nickel plating (Plunger: 镀金0.4um Min 镍底1.4um Min)
- Mechanical:
Total stroke(总行程): 1.40mm
Durability(寿命): 10,000 cycle min.
- Electrical(电性能)
Contact resistance(接触抵抗): 30mOhm Max.
Voltage rating(额定电压): 36V DC Max
Current rating(额定电流): 2.0A

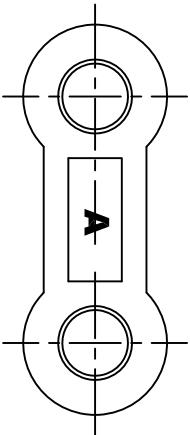

LDC	-
DIST	-

LTR	NEW	REVISION RECORD	APVD	DATE
				2010/09/20

DIMENSIONS IN MM				TOLERANCES UNLESS OTHER SPECIFIED			
0	= ± -	0.0	= ±0.15	0.00	= ±0.10	0.000	= ±
SURF TEXTURE: 32/				ANGLE: ±1°			
REMOVE BURRS, BREAK SHARP EDGES R0.05 MAX				DO NOT SCALE PRINT			
NAME		PGGD CONNECTOR 2 POSITIONS		SCALE		1:1	
CHK		REL		A4		A4	
DWN		APVD		DVG		ND	
MATERIAL		HT TR		FIN		1	
1		—		—		A	
Top-Link Electronics Ltd.		Top-Link Electronics Ltd.		SHEET 1 OF 1		REV A	

USED ON

-

110641-2

PART NUMBER