



THIS INFORMATION IS CONFIDENTIAL AND IS DISCLOSED TO YOU ON CONDITION THAT NO FURTHER DISCLOSURE IS MADE BY YOU TO OTHER THAN TOP-LINK PERSONNEL WITHOUT WRITTEN AUTHORIZATION FROM TOP-LINK LTD.



DWG NO.
C-101397

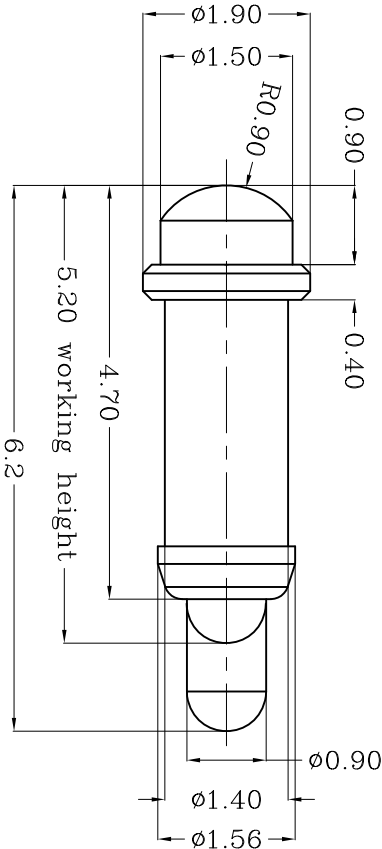

Notes:
△ Material(材质):

1) Body : C36000

2) Plunge : C36000 or C27000

3) Spring : Stainless steel wire

2 Plating(电镀):

1) Body: Min 0.1um Gold plating over min. 1.4um Nickel plating

(Body: 镀金0.1um Min 镍底1.4um Min)

2) Plunger: Min 0.4um Gold plating over min. 1.4um Nickel plating

(Plunger: 镀金0.4um Min 镍底1.4um Min)

3 Mechanical(机械性能):

1) Force: 110±30gf per pin at 1.0mm stroke

(力: 压力1.0mm 的力: 110±30gf)

2) Total stroke(总行程) : 1.40mm

3) Durability(寿命): 10,000 cycle min.

4 Electrical(电性能)

1) Contact resistance(接触抵抗): 30mOhm Max.

2) Voltage rating(额定电压): 36V DC Max

3) Current rating(额定电流): 2.0A

USED DN

-

101397-1

PART NUMBER

FIN — ✓

Top-Link
Electronics
Electronics Ltd.

A

B

C

D

LDC

-

DIST

-

4

3

2

1

DIMENSIONS IN MM			
TOLERANCES UNLESS OTHER SPECIFIED			
0	= ±		
0.0	= ±0.15		
0.00	= ±0.10		
0.000	= ±		
ANGLE: ±1°			
SURF. TEXTURE: 3.2/			
REMOVE BURRS, BREAK			
SHARP EDGES R0.05 MAX			
DID NOT SCALE PRINT			
NAME	SCALE	HT	TR
PG-1.5-0.9-2.0-0.4-1.4-4.7-6.2	1:1	A4	ND
C-101397			
SHEET 1 OF 1			
REV 1			