



THIS INFORMATION IS CONFIDENTIAL AND IS DISCLOSED TO YOU ON CONDITION THAT NO FURTHER DISCLOSURE IS MADE BY YOU TO OTHER THAN TOP-LINK PERSONNEL WITHOUT WRITTEN AUTHORIZATION FROM TOP-LINK LTD.



DWG NO.
C-101397

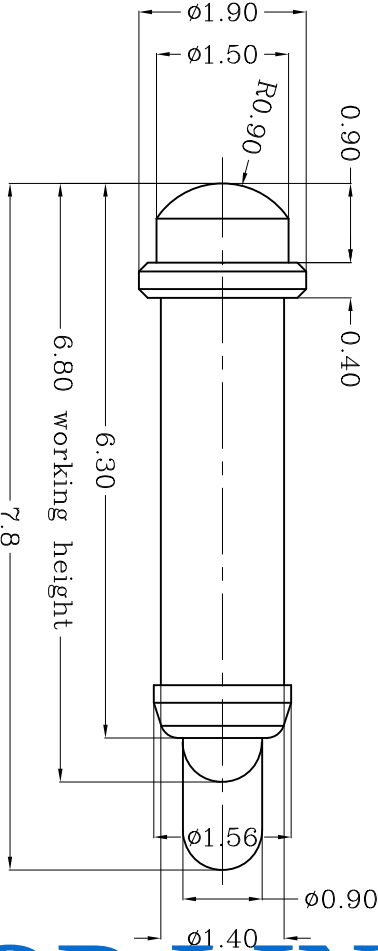

TOP-LINK

Notes:

1)Body : C36000

2)Plunge : C36000 or C27000

3)Spring : Stainless steel wire

Plating(电镀):

1)Body: Min 0.1um Gold plating over min. 1.4um Nickel plating (Body: 镀金0.1um Min 镍底1.4um Min)

2)Plunger: Min 0.4um Gold plating over min. 1.4um Nickel plating (Plunger: 镀金0.4um Min 镍底1.4um Min)

3 Mechanical(机械性能):

1)Force: 110±30gf per pin at 1.0mm stroke

(力: 下压1.0mm的力: 110±30gf)

2)Total stroke(总行程) : 1.40mm

3)Durability(寿命): 10,000 cycle min.

4 Electrical(电性能)

1)Contact resistance(接触抵抗): 30mOhm Max.

2)Voltage rating(额定电压): 36V DC Max

3)Current rating(额定电流): 2.0A

USED DN

-

101453-1

PART NUMBER

MATL	HT	TR	FIN
1	—	—	—

DWN	APVD
he	
CHK	REL

Top-Link
Electronics Ltd.

NAME	PGGD	PIN
PG-1.5-0.9-2.0-0.4-1.4-6.3-7.8		
SCALE	A4	DWG
1:1		C-101453
NAME	PGGD	PIN
PG-1.5-0.9-2.0-0.4-1.4-6.3-7.8		
SCALE	A4	DWG
1:1		C-101453
NAME	PGGD	PIN
PG-1.5-0.9-2.0-0.4-1.4-6.3-7.8		
SCALE	A4	DWG
1:1		C-101453

SURF	TEXTURE	32/
REMOVE BURRS, BREAK		
SHARP EDGES R0.05 MAX		
DD NOT SCALE PRINT		

DATE	APVD	REVISION	LTR
2010/09/10		NEW	
RECORD	RECORD	RECORD	RECORD

LDC	DIST
-	-

4

3

2

1