


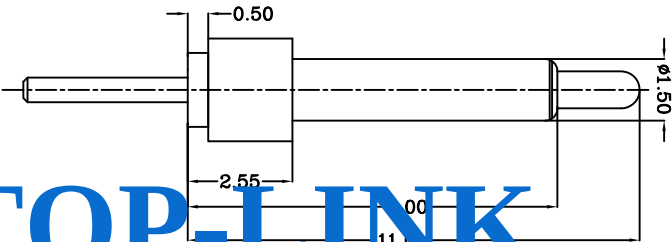


THIS INFORMATION IS CONFIDENTIAL AND IS DISCLOSED TO YOU ON CONDITION THAT NO FURTHER DISCLOSURE IS MADE BY YOU TO OTHER THAN TOP-LINK PERSONNEL WITHOUT WRITTEN AUTHORIZATION FROM TOP-LINK LTD.

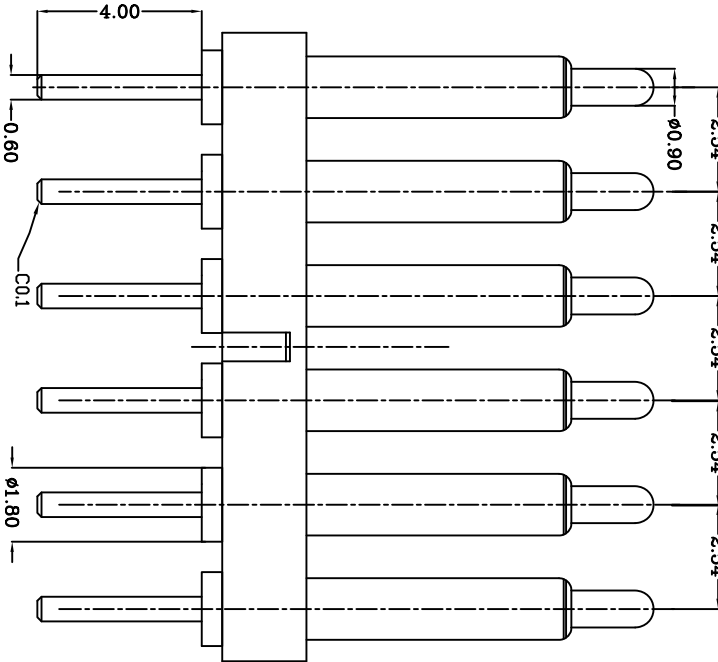


DWG NO.

C-110494

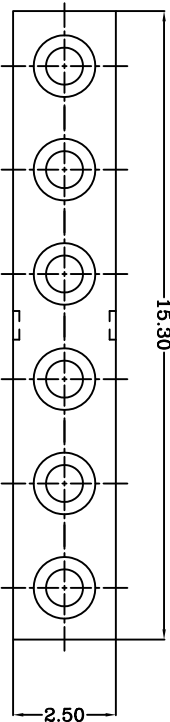

TOP-LINK

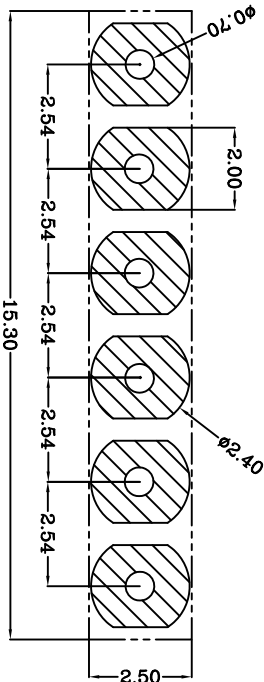

Recommended PCB Layout

Notes:
1) Material (材質):

Housing: High temp. Plastic, UL94 V-0 Color Black.

Contact: Brass

Spring: Stainless steel wire

2) Plating:

1) Body: Min 0.1um Gold plating over min. 1.4um Nickel plating

(Body: 鍍金0.1um Min 鍍底1.4um Min)

2) Plunger: Min 0.4um Gold plating over min. 1.4um Nickel plating


(Plunger: 鍍金0.4um Min 鍍底1.4um Min)

USED ON

-

110494-6

PART NUMBER



Top-Link
Electronics Ltd.

NAME BATTERY POGO CONNECTOR 6 POSITIONS

PGC-1.5-11.0-R-6P-2.54PH

SCALE	A4	DWG NO.	C-110494	SHEET 1 OF 1	REV A
-------	----	---------	----------	--------------	-------

DIMENSIONS IN MM	TOLERANCES UNLESS OTHER SPECIFIED
0	= ±
0.0	= ±0.15
0.00	= ±0.10
0.000	= ±
ANGLE: ±1°	
SURF. TEXTURE: 32/	
REMOVE BURRS, BREAK SHARP EDGES R0.05 MAX	
DO NOT SCALE PRINT	

NEW	REVISION RECORD	APVD	DATE
09/03/23			

LDC	DIST
-	-

4

3

2

1