


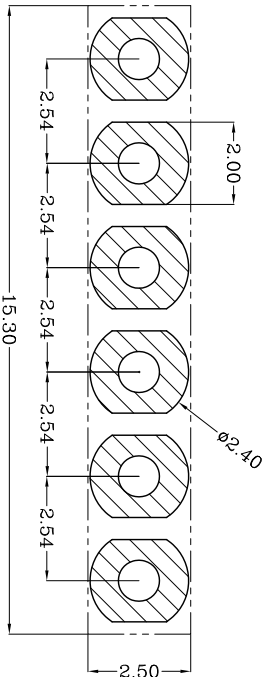
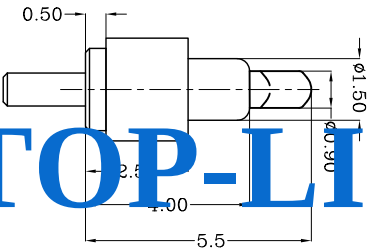


THIS INFORMATION IS CONFIDENTIAL AND IS DISCLOSED TO YOU ON CONDITION THAT NO FURTHER DISCLOSURE IS MADE BY YOU TO OTHER THAN TOP-LINK PERSONNEL WITHOUT WRITTEN AUTHORIZATION FROM TOP-LINK LTD.

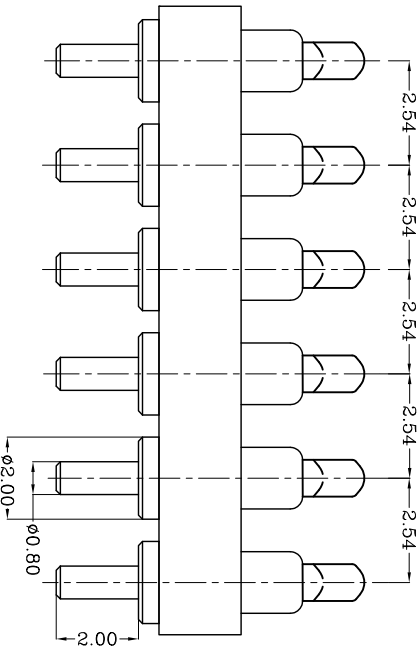

DWG NO.
C-110553

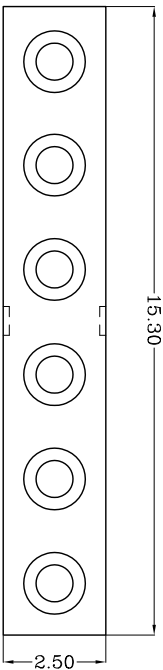

Recommended PCB Layout

TOP-LINK

Notes:
1 Material, Housing: PA 4.6 (30% Glass Filled)
Color Black.

2 Mechanical demands:
Plating Plunger: Min 0.1um Au over 1.25um Ni
Plating Body: Min 0.075um Au over 1.25um Ni.

Contact: Brass

LDC

DIST

-

NEW	2009/09/14
REVISION	DATE
RECORD	APVD
LTR	DATE

DIMENSIONS IN MM
TOLERANCES UNLESS
OTHER SPECIFIED
0 = ±
0.0 = ±0.15
0.00 = ±0.10
0.000 = ±
ANGLE: ±1°
SURF TEXTURE: 32/
REMOVE BURRS, BREAK
SHARP EDGES R0.05 MAX
DO NOT SCALE PRINT

MATL	HT TR	FIN	NAME	SCALE	A4	DWG NO.	C-110553	SHEET 1 OF 1	REV 1
DWN	APVD	REL	BATTERY POGO CONNECTOR 6 POSITIONS PGC-1.5-5.5-R-6P-2.54PH	1:1	A4	NO.	C-110553	1	1
CHK	REL	REL	Top-Link Electronics Ltd.	1:1	A4	NO.	C-110553	1	1

110553-6
PART NUMBER

USED ON

-