


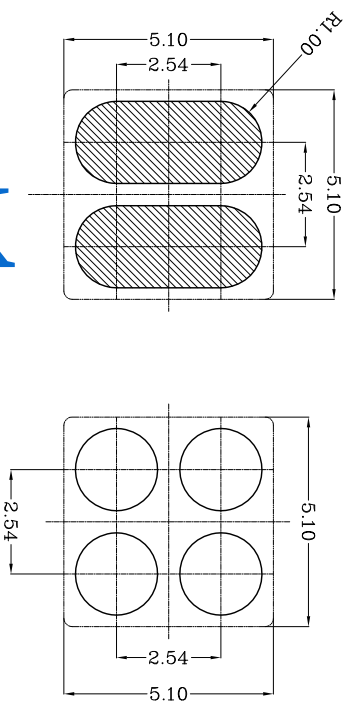

Recommended solder paste thickness is 0.10 mm

- Notes:

1) Material (材料): + 30% Glass fiber; UL94 V-0 Color Black.

Housing: P

Contact: Brass

Spring : Stainless steel wire

2 Plating:

1) Body: Min 0.4um Gold plating over min. 1.4um Nickel plating
(Body: 镀金 0.4um Min 镍底1.4um Min)

2) Plunger: 4um Gold plating over min. 1.4um Nickel plating
(Plunger: 镀金 0.4um Min 镍底1.4um Min)

3 Mechanical:

Total stroke (总行程): 1.00mm

Durability (寿命): 10,000 cycle min.

4 Electrical (电性能)

Contact resistance (接触抵抗): 30mOhm Max.

Voltage rating (额定电压): 36V DC Max

Current rating (额定电流): 2.0A

LDC			ANGLE: 11	NAME	POGD CONNECTOR 4 POSITIONS		
-		NEW	SURF TEXTURE: 32/ V	PGC-1.5-4.0-2R-4P-2.54PH			
DIST			REMOVE BURRS, BREAK SHARP EDGES R0.05 MAX DO NOT SCALE PRINT	SCALE	DWG NO. C-100280	SHEET 1 OF 1	REV A
-	LTR	REVISION RECORD	APVD	DATE			