


proposal

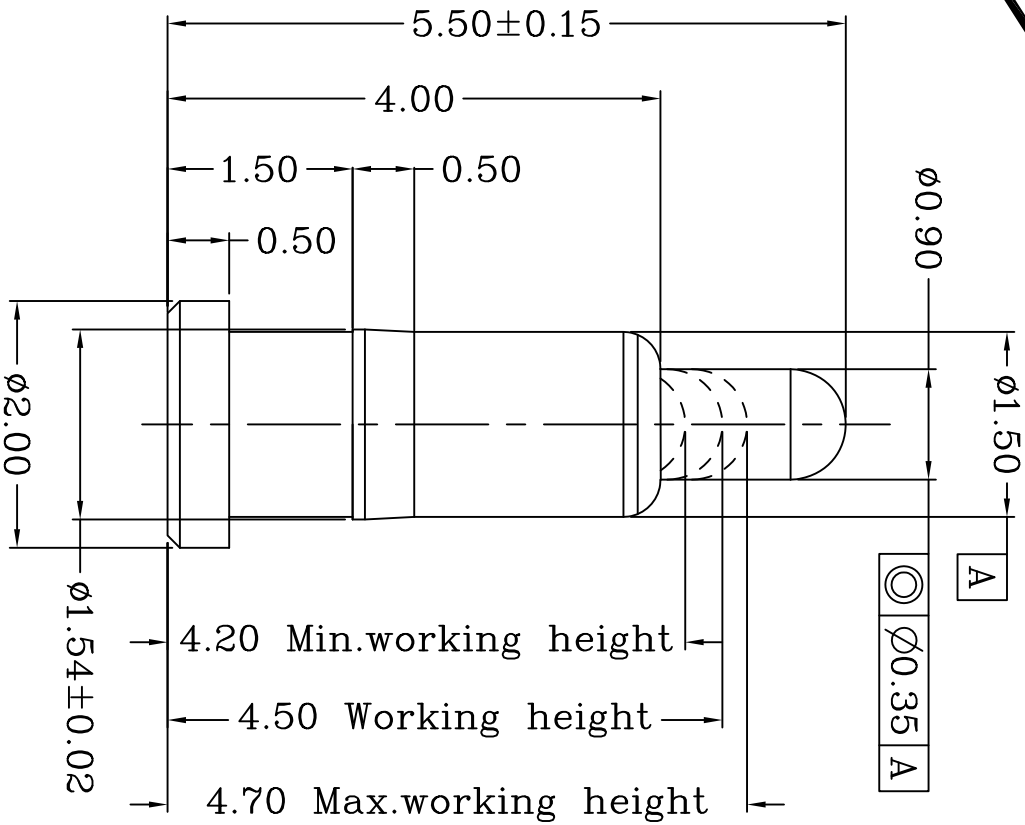

TOP-LINK

Item	Part name	Qty/Ea	Material	Finish
1	Body	1	Leaded Brass	Au 0.1um plating Ni 1.4um
2	Plunger	1	Leaded Brass	Au 0.4um plating Ni 1.4um
3	Spring	1	Stainless steel wire	_____
4				
5				

Table 1 Mechanical performance		
Working height	4.50mm	120±30g<2.1>
Durability	10000cycle	

- Notes:
- 1 Dimensions shall be interpreted per ASME Y14.5M.
 - 2 Mechanical performance(See the table 1)
<2.1>The force is the average of forces obtained when plunger goes downwards and upwards.
<2.2>Warning: Working height are not permitted to be less than Min working height.
 - 3 Electrical performance
Resistance: 30mOhm Max.
Current rating: 3.0A
 - 4 RoHS compliant.

E3	Update	2016/07/13	Top-Link Electronics Ltd.	Type	Customer drawing	Unit	mm	Weight	_____
E2	Update	2016/02/24	TOLERANCES UNLESS OTHER SPECIFIED	DWN:	Cai wonlu	APVD:			
E1	Update	2015/12/25	0.0 = ±0.15 0.00 = ±0.10 0.000 = ±0.05	CHK:		REL:			
E	Update remark	2007/12/14	Angle: ±1° SURF. TEXTURE: REMOVE BURRS: BREAK SHARP EDGES R0.05 MAX. DO NOT SCALE PRINT.	Name	POGO PIN				
Rev.	Revision record.	Date.		Scale	1:1	Size	A4	DWG No.	C-101001
								Page	1/1
								Rev.	E3

101001-1
PART NUMBER