


DWG NO.
C-101010

THIS INFORMATION IS CONFIDENTIAL AND IS DISCLOSED TO YOU ON CONDITION THAT NO FURTHER DISCLOSURE IS MADE BY YOU TO OTHER THAN TOP-LINK PERSONNEL WITHOUT WRITTEN AUTHORIZATION FROM TOP-LINK LTD.

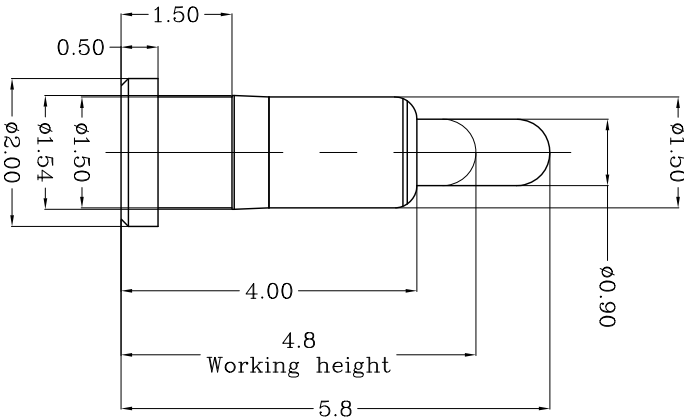

Notes:
△ Material (材质):

- 1) Body: Brass
- 2) Plunger: Brass
- 3) Spring: Stainless steel wire
- 4) Plating (电镀):

- 1) Body: Min 0.1um Gold plating over min. 1.4um Nickel plating (Body: 镀金0.1um Min 镍底1.4um Min)
- 2) Plunger: Min 0.4um Gold plating over min. 1.4um Nickel plating (Plunger: 镀金0.4um Min 镍底1.4um Min)
- 3) Mechanical (机械性能):
 - 1) Force: Min 90gf per pin at 1.0mm stroke (力: 最小1.0mm的力: Min 90gf)
 - 2) Total stroke (总行程): 1.50mm
 - 3) Durability (寿命): 10,000 cycle min.
- 4) Electrical (电性能):
 - 1) Contact resistance (接触抵抗): 30mOhm Max.
 - 2) Voltage rating (额定电压): 36V DC Max
 - 3) Current rating (额定电流): 2.0A

TOP-LINK

USED ON
-

101010-1

PART NUMBER

MATL	△	HT TR	FIN
DWN		APVD	—
CHK		REL	—

Top-Link
Electronics Ltd.

NAME
PGGD PIN
PG-2.0-0.5-1.5-5.8H

SURF TEXTURE: 32/
REMOVE BURRS, BREAK
SHARP EDGES R0.05 MAX
DO NOT SCALE PRINT

SCALE
1:1
A4
DWG
NO.
C-101010

SHEET
1 OF 1
REV
A

NEW	REVISION RECORD	APVD	DATE
LTR			

LDC	-
DIST	-

4

3

2

1