


DWG NO.
C-101014

THIS INFORMATION IS CONFIDENTIAL AND IS DISCLOSED TO YOU ON CONDITION THAT NO FURTHER DISCLOSURE IS MADE BY YOU TO OTHER THAN TOP-LINK PERSONNEL WITHOUT WRITTEN AUTHORIZATION FROM TOP-LINK LTD.

LDC
-
DIST
-

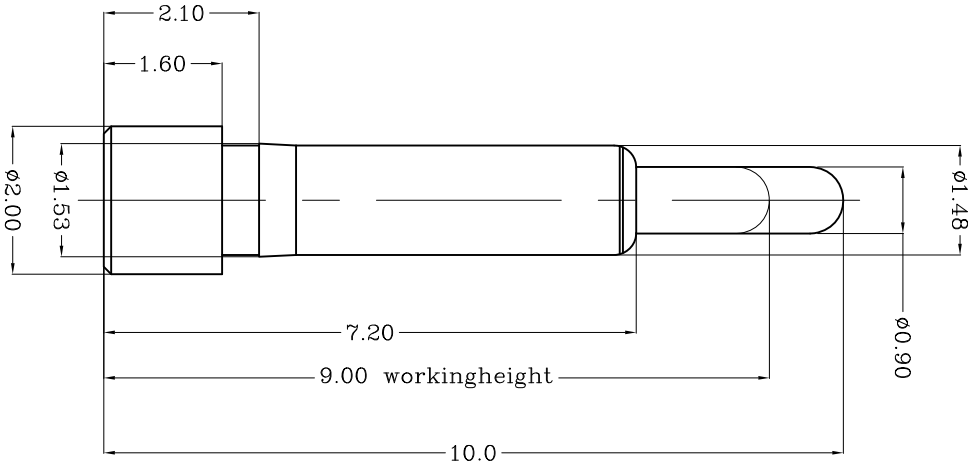

Notes:
△ Material(材质):

- 1) Body : Brass
- 2) Plunger : Brass
- 3) Spring : Stainless steel wire

- 1) Body: Min 0.1um Gold plating over min. 1.4um Nickel plating (Body 镀金0.1um Min 镍底1.4um Min)
- 2) Plunger: Min 0.4um Gold plating over min. 1.4um Nickel plating (Plunger 镀金0.4um Min 镍底1.4um Min)

3) Mechanical(机械性能):

- 1) Force: 100±25gf per pin at 1.0mm stroke (力: 100±25gf 的力: 100±25gf)
- 2) Total stroke(总行程) : 2.70mm
- 3) Durability(寿命): 10,000 cycle min.
- 4) Electrical(电性能)
- 1) Contact resistance(接触抵抗): 30mOhm Max.
- 2) Voltage rating(额定电压): 36V DC Max
- 3) Current rating(额定电流): 2.0A

TOP LINK

update remark		2023/09/10
REVISION RECORD	APVD	DATE
L TR		

DIMENSIONS IN MM			
TOLERANCES UNLESS OTHER SPECIFIED			
0	= ± -		
0.0	= ±0.15		
0.00	= ±0.10		
0.000	= ±		
ANGLE: ±1°			
SURF TEXTURE: 3.2/			
REMOVE BURRS, BREAK SHARP EDGES R0.05 MAX			
DO NOT SCALE PRINT			
MATL	△	HT TR	—
DWN	Qin	APVD	
CHK		REL	
NAME			
POGO PIN			
PG-2.0-1.6-1.5-7.2-10.0			
SCALE	1:1	A4	DWG NO. C-101014
SHEET			REV B
1 OF 1			

101014-1
PART NUMBER

USED ON

-