



THIS INFORMATION IS CONFIDENTIAL AND IS DISCLOSED TO YOU ON CONDITION THAT NO FURTHER DISCLOSURE IS MADE BY YOU TO OTHER THAN TOP-LINK PERSONNEL WITHOUT WRITTEN AUTHORIZATION FROM TOP-LINK LTD.



DWG NO.
C-101023

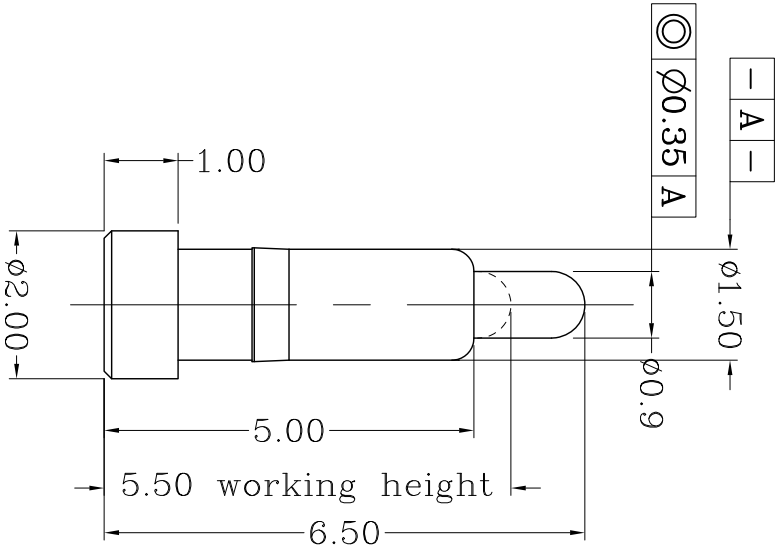

Notes:

△Material(材质):

1)Body : Brass

2)Plunge : Brass

3)Spring : Stainless steel wire

2 Plating(电镀):

1)Plunger: Min 0.1um Gold plating over min. 1.4um Nickel plating

(Body: 镀金0.1um Min 镍底1.4um Min)

2)Plunger: Min 0.4um Gold plating over min. 1.4um Nickel plating

(Plunger: 镀金0.4um Min 镍底1.4um Min)

3 Mechanical(机械性能):

1)Force 125±30gf per pin at 1.0mm stroke

(力: 125.0mm的力:125±30gf)

2)Total stroke(总行程) : 1.40mm

3)Durability(寿命): 10,000 cycle min.

4 Electrical(电性能)

1)Contact resistance(接触阻抗): 30mOhm Max.

2)Voltage rating(额定电压): 36V DC Max

3)Current rating(额定电流): 2.0A

TOP-LINK

USED ON

-

101023-1
PART NUMBER

A

B

C

D

LDC	-
DIST	-

	renewal			2010/09/27
	NEW			2007/05/06
LTR	REVISION RECORD	APVD	DATE	

DIMENSIONS IN MM				MATL	HT TR	FIN
TOLERANCES UNLESS OTHER SPECIFIED				△1	—	—
0	= ± -	DWN	APVD	REL	Top-Link Electronics Ltd.	
0.0	= ±0.10	CHK	REL			
0.00	= ± -					
0.000	= ±					
SURF TEXTURE: 32/				NAME	POGO PIN PG-2.0-1.0-1.5-6.5	
ANGLE: ±1°				SCALE		
REMOVE BURRS, BREAK SHARP EDGES R0.05 MAX				1:1	A4	DWG NO. C-101023
DO NOT SCALE PRINT						

4

3

2

1

SHEET 1 OF 1
REV B