



DWG NO.
101040

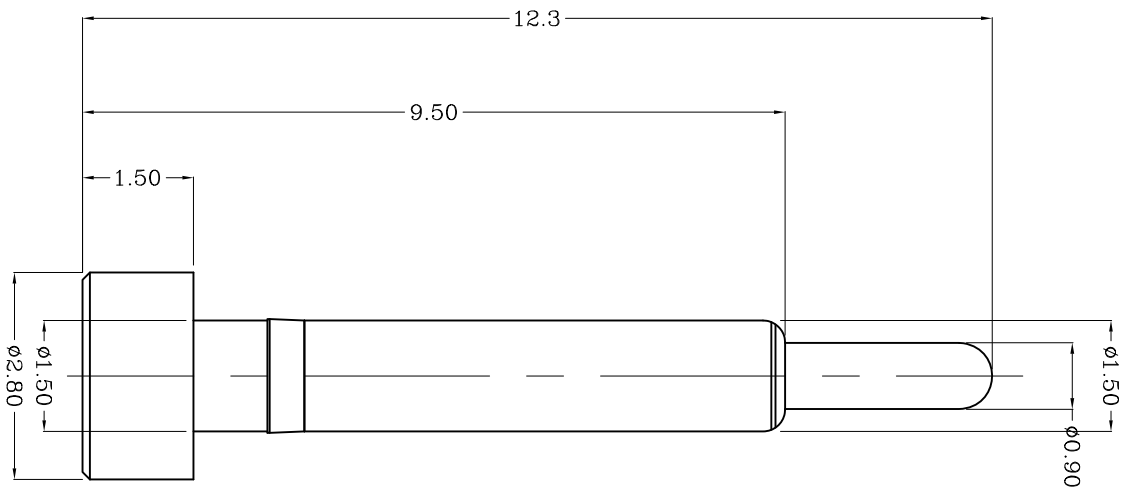

TOP-LINK

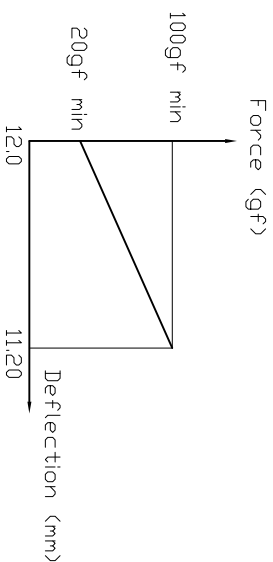

Notes:
Material:

Material:

1)Plunger & Body : CuZn36 Pb3, HO2 (C36000)

or CuZn₃₉ PB3 or CuZn₃₈ PB2 or CuZn₃₆(C2700).

2) Spring : Stainless steel wire

2 Plating

1)Body: Min 0.1um Gold plating over min. 1.4um Nickle plating

2)Plunger: Min 0.4um Gold plating over min. 2.5um Nickle plating

3 Mechanical

1) Total stroke : 2.5mm

2)Durability: 10,000 cycle min.

4 Electrical

1)Contact resistance: 30mOhm Max.

2) Operating voltage: 36VDC

LDC				ANGLE: 1°	NAME	PGGD PIN	
-		NEW		SURF TEXTURE: 32/ V	SCALE	PG-2.8-1.5-1.5-12.3	
DIST		REVISION	APVD	REMOVE BURRS, BREAK SHARP EDGES R0.05 MAX DO NOT SCALE PRINT	A4	DWG NO. 101040	SHEET 1 OF 1
-		LTR	RECORD	DATE	1:1		REV A

DIMENSIONS IN MM TOLERANCES UNLESS OTHER SPECIFIED				MATL		HT TR	—	FIN	— 
0	= ±			DWN		APVD		Top-Link Electronics	
0.0	= ±0.15			CHK		REL			
0.00	= ±0.10								
0.000	= ±								
ANGLE: ±1°									
SURF. TEXTURE: 32/				NAME					
REMOVE BURRS, BREAK SHARP EDGES R0.05 MAX				PGGD PIN					
DO NOT SCALE PRINT				PG-28-1.5-1.5-12.3					
SCALE		A4	DWG ND.	101040	SHEET 1 OF 1		REV A		

101040-1
PART NUMBER

USED ON