



DWG NO.
C-101043-1

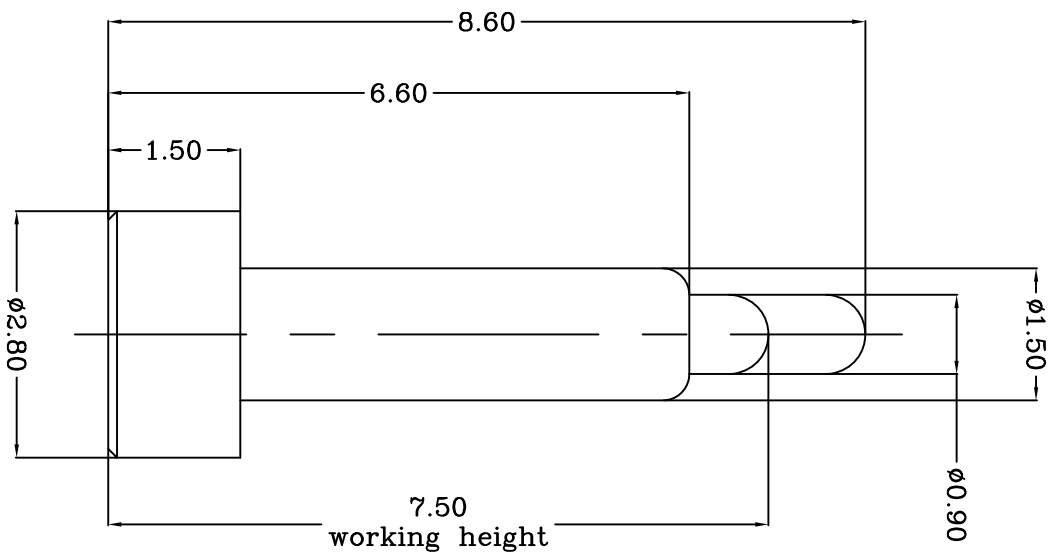

TOP-LINK

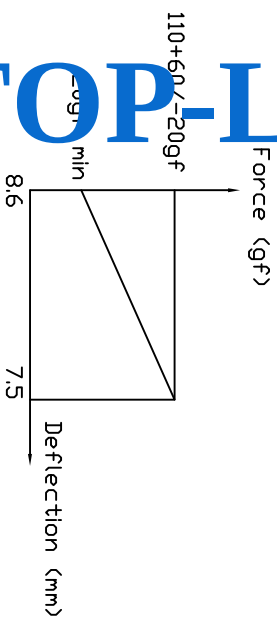

Notes: Mat

Material: 

1)Plunger & Body : CuZn36 Pb3, HO2 (C36000)

or CuZn39 PB3 or CuZn38 PB2.

2 Plating

1)Body: Min 0.1um Gold plating over min. 1.4um Nickle plating

2)Plunger: Min 0.4um Gold plating over min. 2.5um Nickle plating

3 Mechanical

1) Total stroke : 2.0mm

2)Durability: 10,000 cycle min

2)Durability
Electrical

1)Contact resistance: 30mOhm Max..

2) Operating voltage: 36VDC

	NEW		8007/04/05
LTR	REVISION RECORD	APVD	DATE

DIMENSIONS IN MM TOLERANCES UNLESS OTHER SPECIFIED		MATL		HT TR	—	FIN	—	
0	= ±	DWN		APVD		Top-Link Electronics Electronics Ltd.		
0.0	= ±0.10	Benny		Lensing				
0.00	= ±0.10	CHK		REL				
0.000	= ±	Andy						
ANGLE: ±1°								
SURF. TEXTURE: 32/		NAME		PGGD PIN				
REMOVE BURRS, BREAK SHARP EDGES, ROUNDS MAX		SCALE	A4	DWG NO.	C-101043-1	SHEET 1 OF 1	REV	A
DO NOT SCALE PRINT		1:1						

USED ON

1