

DIST

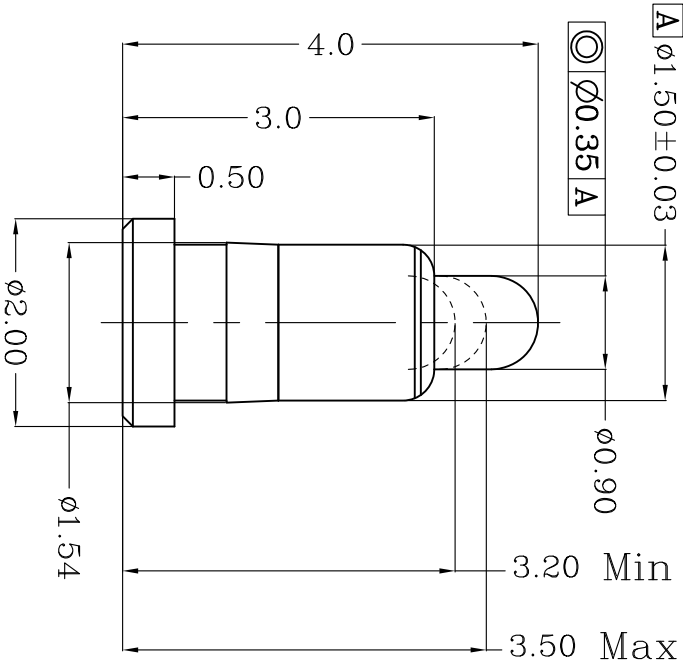


Table 1 Mechanical performance			
INK	Max working height	3.50mm	110±25gf <2.1>
	Min working height	3.20mm	140±35
	Durability	10000cycle	

Item	Part name	Q'ty/Ea'	Material	Finish
1	Body	1	Leaded Brass	Au plating over Ni
2	Plunger	1	Leaded Brass	Au plating over Ni
3	Spring	1	Stainless steel wire	_____
4				
5				

Not
1 Dimensions shall be interpreted per ASME Y14.5M.
2 Mechanical performance(See the table 1)
<2.1> The force is the average of forces obtained when plunger goes downwards and upwards.
<2.2> Warning: Working height are not permitted to be less than min working height.
3 Electrical performance
Resistance: 30mOhm Max.
Current rating: 2.0A
4 RoHS compliant.

TOP LINK

Rev.	Renewal	2011/08/02
	NEW	2011/05/23
Rev.	Revision record.	Date.

Top-Link Electronics Ltd.		Type	Customer drawing	Unit	mm	Weight	PART NUMBER	
TOLERANCES UNLESS OTHER SPECIFIED		DWN:	Qin zuozhong	APVD:			101046-1	
0.0 = ± 0.15		CHK:		REL:			Top-Link Electronics	
0.00 = ± 0.10		Name POGO PIN						Top-Link Electronics Ltd.
0.000 = ± 0.005		SURF. TEXTURE: REMOVE BURRS.						
Angle: ±1°		BREAK SHARP EDGES						
SCALE PRINT.		R0.05 MAX/DO NOT						
Scale	1:1	Size	A4	DWG No.	C-101046	Page	1/1	Rev. C