



THIS INFORMATION IS CONFIDENTIAL AND IS DISCLOSED TO YOU ON CONDITION THAT NO FURTHER DISCLOSURE IS MADE BY YOU TO OTHER THAN TOP-LINK PERSONNEL WITHOUT WRITTEN AUTHORIZATION FROM TOP-LINK LTD.




DWG NO.
C-101052

LDC
-
DIST
-

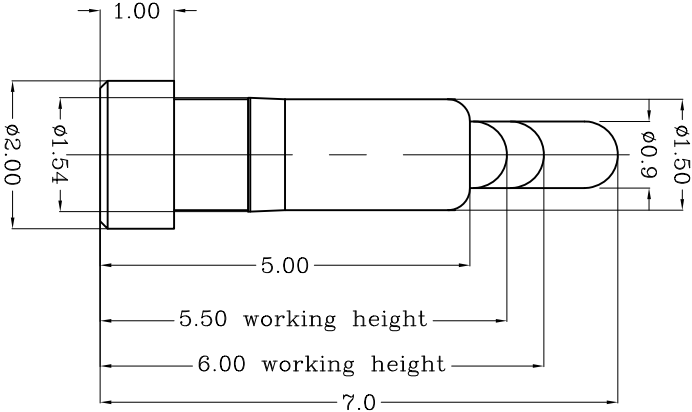

TOP-LINK

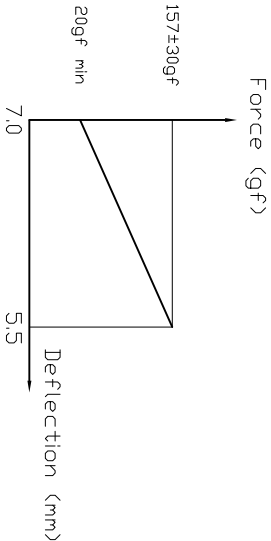

- Notes:
- Material:
- 1)Plunger & Body : CuZn36 Pb3, H02 (C36000)
or CuZn39 PB3 or CuZn38 PB2.
- 2)Spring : Stainless steel wire
- 2 Plating
- 1)Body: Min 0.1um Gold plating over min. 1.4um Nickel plating
- 2)Plunger: Min 0.4um Gold plating over min. 1.4um Nickel plating
- 3 Mechanical
- 1)Total stroke : 1.8mm
- 2)Durability: 10,000 cycle min.
- 4 Electrical
- 1)Contact resistance: 30mOhm Max.
- 2)Operating voltage: 36VDC

NEW			08/07/05/06
REVISION			
RECORD			
APVD			
DATE			

DIMENSIONS IN MM				TOLERANCES UNLESS OTHER SPECIFIED			
0	= ± -	0.0	= ±0.15	0.00	= ±0.10	0.000	= ± -
ANGLE: ±1°							
SURF TEXTURE: 32/							
REMOVE BURRS, BREAK SHARP EDGES R0.05 MAX							
DO NOT SCALE PRINT							
MATL	1	HT TR	-	FIN	-	FIN	-
DWN		APVD		Lansing		REL	
CHK							
Jim							
NAME	POGO PIN						
SCALE	1:1	A4	DWG NO.	C-101052	SHEET	1 OF 1	REV
							A

101052-1
PART NUMBER

USED ON

-