THIS INFORMATION IS CONFIDENTIAL AND IS DISCLOSED TO YOU ON CONDITION THAT
NO FURTHER DISCLOSURE IS MADE BY YOU TO OTHER THAN TOP-LINK PERSONNEL WITHOUT
WRITTEN AUTHORIZATION FROM TOP-LINK LTD.

DWG NO. C-101078

USED ON

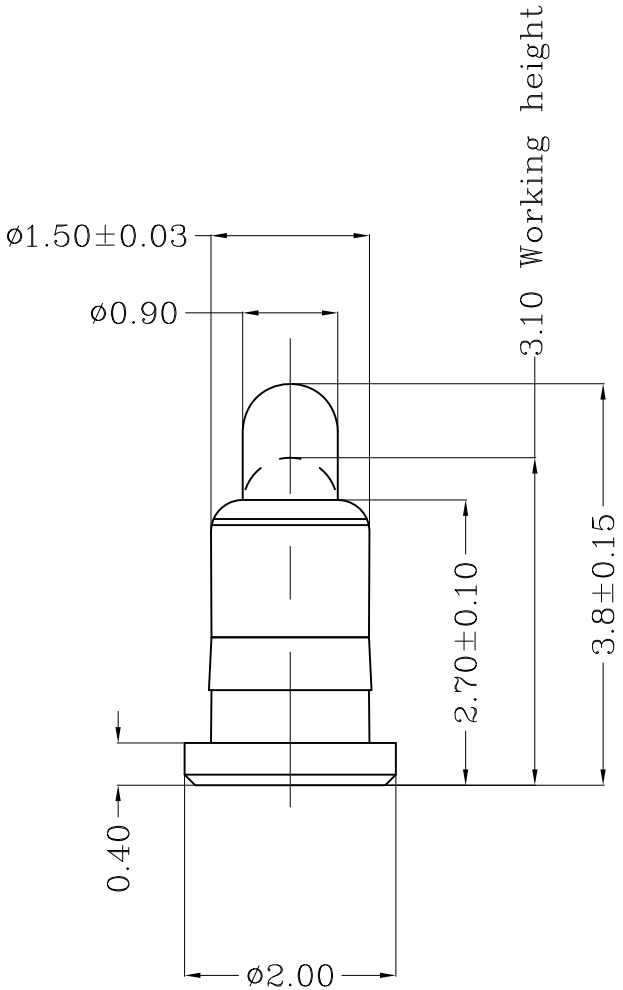

Notes:

1 Material(材质):
- 1)Body : Brass
- 2)Plunge : Brass
- 3)Spring : Stainless steel wire

2 Plating(电镀):
- 1)Body: Min 0.1um Gold plating over min. 1.4um Nickel plating
- (Body: 镀金0.1um Min 镍底1.4um Min)
- 2)Plunger: Min 0.4um Gold plating over min. 1.4um Nickel plating
- (Plunger: 镀金0.4um Min 镍底1.4um Min)

3 Mechanical(机械性能):
- 1)Force: 80±30gf per pin at 0.7mm stroke
- (力:下压0.7mm的力:80±30gf)
- 2)Total stroke(总行程) : 0.90mm
- 3)Durability(寿命): 10,000 cycle min.

4 Electrical(电性能)
- 1)Contact resistance(接触阻抗): 30mOhm Max.
- 2)Voltage rating(额定电压): 36V DC Max
- 3)Current rating(额定电流): 2.0A

TOP-LINK

LTR	REVISION RECORD	APVD	DATE
	Add dimension		2008/07/01

LOC -
DIST -

DIMENSIONS IN MM
TOLERANCES UNLESS OTHER SPECIFIED
0 = ±-
0.0 = ±0.05
0.00 = ±0.03
0.000 = ±
ANGLE: ±1°
SURF TEXTURE: 3.2
REMOVE BURRS. BREAK SHARP EDGES R0.05 MAX
DO NOT SCALE PRINT

MATL 1	HT TR —	FIN — √	
DWN Qin	APVD Lansing	top-Link Electronics	Top-Link Electronics Ltd.
CHK Jim	REL		
NAME	POGO PIN PG-2.0-0.4-1.5-2.7-3.8		
SCALE 1:1	A4	DWG NO. C-101078	SHEET 1 OF 1 / REV D

101078-1
PART NUMBER

4 3 2 1