


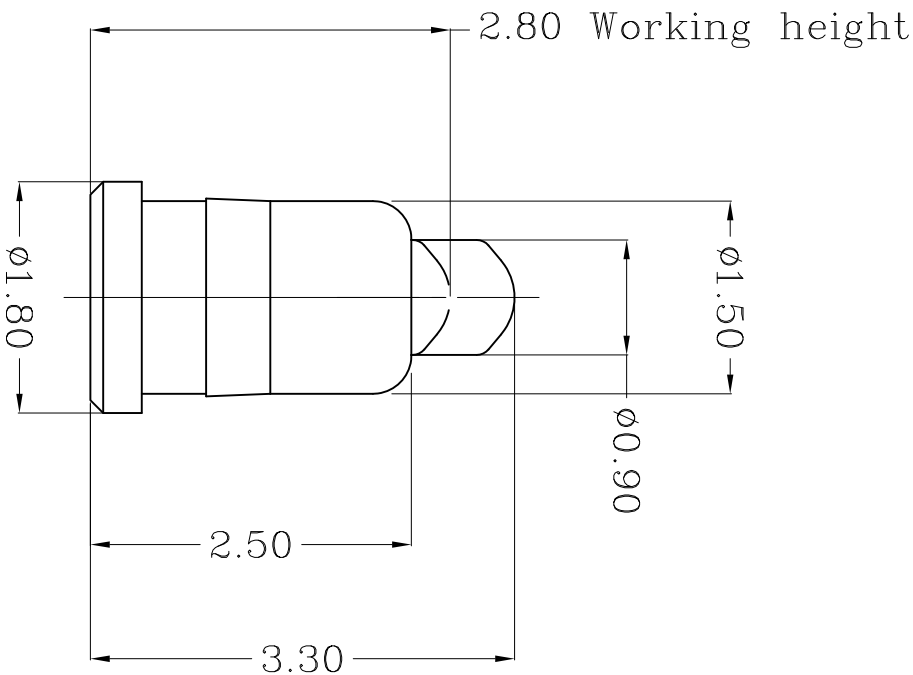

Item	Part name	Qty/Ea	Material	Finish
1	Body	1	Leaded Brass	Au 0.1um plating Ni 1.4um
2	Plunger	1	Leaded Brass	Au 0.4um plating Ni 1.4um
3	Spring	1	Stainless steel wire	—————
4				
5				

Table 1 Mechanical performance

Table 1 Mechanical performance		
working height	2.80mm	70gf Min
Durability	10000cycle	

§

1 Dimensions shall be interpreted per ASME Y14.5M.

 Mechanical performance(See the table 1)

2.3.1 The force is the average of forces obtained when plunger

goes downwards and upwards.

3 Electrical performance

Resistance: 30mOhm Max.

Current rating: 2.0A

PHS compliant.

TOP LINK

101080-1
PART NUMBER

Top-Link Electronics Ltd.	Type	Unit	Weight
	Customer drawing	mm	_____

DMM:	APVD:	<i>Top-Link</i> Electronics Top-Link Electronics Ltd.
Cai wonlu		
CHK:	REL:	

Name
POGO PIN

	Update	2015/08/05
	update remark	2012/10/10
Rev.	Revision record.	Date.