


DWN No.:
C-101112

proposal

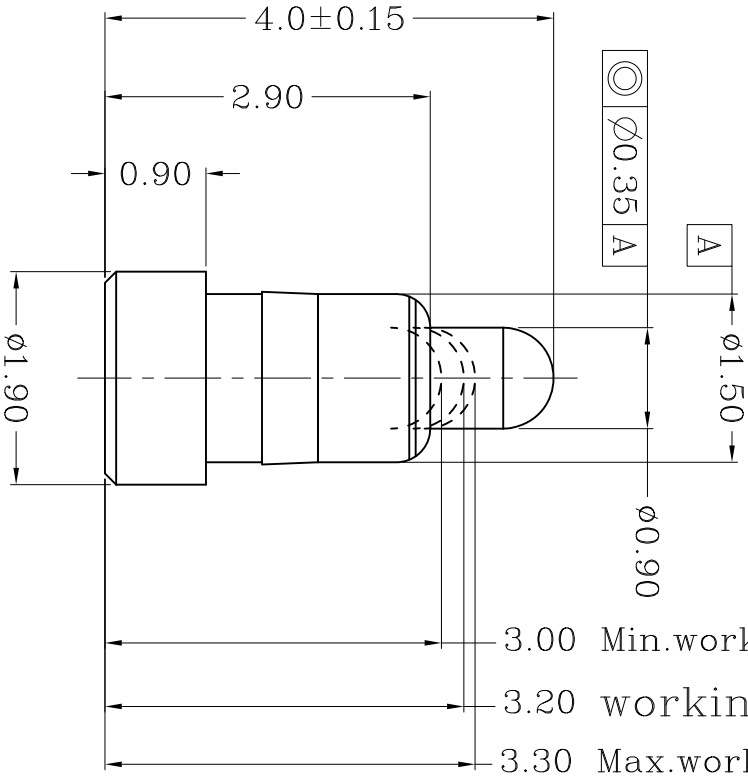

TOP-LINK

Notes:

- 1 Dimensions shall be interpreted per ASME Y14.5M.
- 2 Mechanical performance(See the table 1)
- 2.1>The force is the average of forces obtained when plunger goes downwards and upwards.
- 2.2>Warning: Working height are not permitted to be less than Min working height.
- 3 Electrical performance
- Resistance: 30mOhm Max.
- Current rating: 2.0A
- 4 RoHS compliant.

Table 1 Mechanical performance

working height	3.20mm	120±35gf <2.1>
Durability	10000cycle	

Item	Part name	Qty/Ed	Material	Finish
1	Body	1	Leaded Brass	Au 0.1um plating Ni 1.4um
2	Plunger	1	Leaded Brass	Au 0.4um plating Ni 1.4um
3	Spring	1	Stainless steel wire	_____
4				
5				

Rev.	A1	Update	2015/07/08
Rev.	A	NEW	2007/10/07
Rev.		Revision record.	Date.

Top-Link Electronics Ltd.		Type	Customer drawing	Unit	mm	Weight	_____
TOLERANCES UNLESS OTHER SPECIFIED		DWN:	Cai wanlu	APVD:		Top-Link Electronics Top-Link Electronics Ltd.	
0.0 = ±0.15		CHK:		REL:			
0.00 = ±0.10		Name					POGO PIN
0.000 = ±0.05							
SURF. TEXTURE:							
REMOVE BURRS:							
BREAK SHARP EDGES		Scale					
R0.05 MAX.DO NOT SCALE PRINT.							
		1:1	A4	DWG No.	C-101112	Page	1/1
						Rev.	A1

101112-1
PART NUMBER