



LDC	-
DIST	-

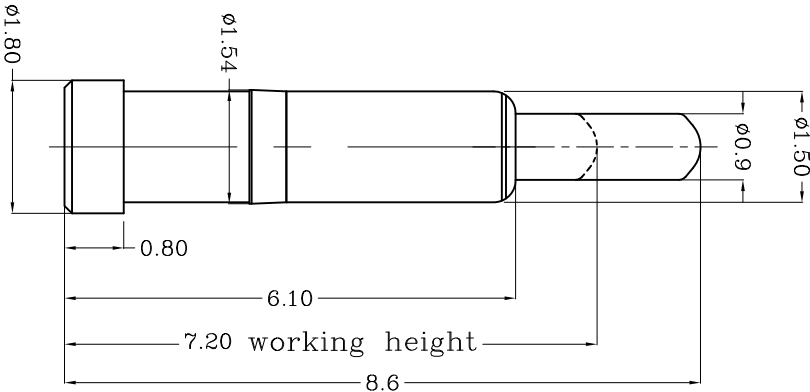

TOP-LINK

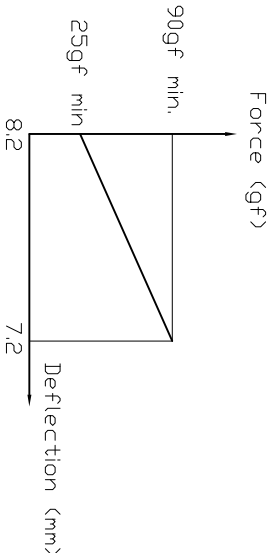

Notes:

- Material:
1)Plunger & Body : Brass
2)Spring : Stainless steel wire
2 Plating
1)Body: 0.1um Gold plating over min. 1.4um Nickel plating
2)Plunger: 0.4um Gold plating over min. 1.4um Nickel plating
3 Mechanical
1)Total stroke : 2.3mm
2)Durability: 10,000 cycle min.
4 Electrical
1)Contact resistance: 30mOhm Max.
2)Operating voltage: 36VDC

DIMENSIONS IN MM TOLERANCES UNLESS OTHER SPECIFIED			
0	= ± -		
0.0	= ±0.10		
0.00	= ± 0.10		
0.000	= ±		
ANGLE: ±1°			
SURF TEXTURE: 32/			
REMOVE BURRS, BREAK SHARP EDGES R0.05 MAX			
DO NOT SCALE PRINT			
MATL	1	HT TR	FIN
DWN	APVD		
CHK	REL		
NAME			
POGO PIN			
PG-1.8-0.8-1.5-6.1-8.6			
SCALE	A4	DWG NO.	C-101146
1:1			
SHEET			
1 OF 1			
REV			
A			

Top-Link
Electronics Ltd.

USED ON

-