



THIS INFORMATION IS CONFIDENTIAL AND IS DISCLOSED TO YOU ON CONDITION THAT NO FURTHER DISCLOSURE IS MADE BY YOU TO OTHER THAN TOP-LINK PERSONNEL WITHOUT WRITTEN AUTHORIZATION FROM TOP-LINK LTD.




DWG NO.
C-101268

LDC
-
DIST
-

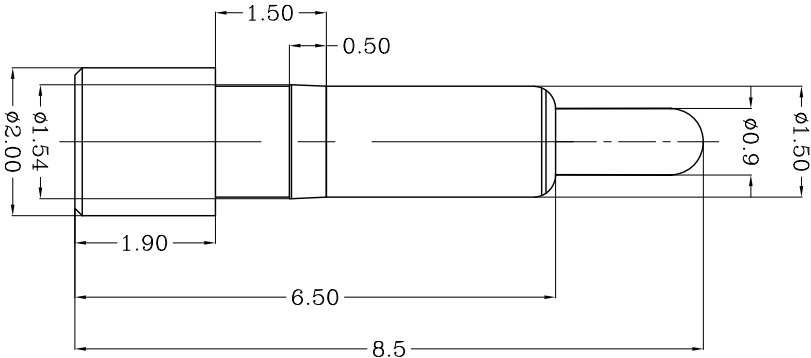

TOP-LINK

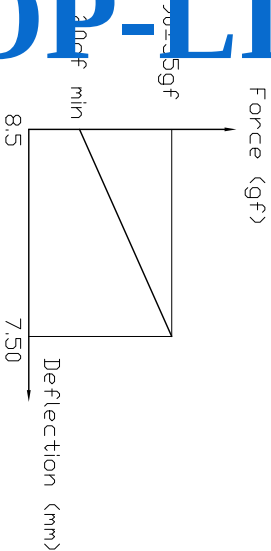

- Notes:
- Material:
- 1)Plunger & Body : CuZn36 Pb3, H02 (C36000)
or CuZn39 PB3 or CuZn38 PB2.
- 2)Spring : Stainless steel wire
- 2 Plating
- 1)Body: Min 0.1um Gold plating over min. 1.4um Nickle plating
- 2)Plunger: Min 0.4um Gold plating over min. 1.4um Nickle plating
- 3 Mechanical
- 1)Total stroke : 1.8mm
- 2)Durability: 10,000 cycle min.
- 4 Electrical
- 1)Contact resistance: 30mOhm Max.
- 2)Operating voltage: 36VDC

USED ON

-

DIMENSIONS IN MM				MATL		HT TR		FIN	
TOLERANCES UNLESS OTHER SPECIFIED				1		—		—	
0 = ±-				DWN		APVD		Top-Link	
0.0 = ±0.15				CHK		REL		Electronics	
0.000 = ±-				ANGLE: ±1°				Top-Link	
SURF TEXTURE: 32/				NAME		POGO PIN		Top-Link	
REMOVE BURRS, BREAK SHARP EDGES R0.05 MAX				SCALE		DWG		Electronics Ltd.	
DO NOT SCALE PRINT				1:1		NO.		PG-2.0-1.9-1.5-6.5-8.5	
				A4		C-101268		SHEET	
								1 OF 1	
								REV	
								A	

101268-1

PART NUMBER

Top-Link

Electronics

A

B

C

D

4

3

2

1